

TEST REPORT (WIFI)

Applicant: SHENZHEN WLINK TECHNOLOGY CO., LTD.

Address of Applicant: 2A, F5 Building, TCL International E City, No.1001
Zhongshanyuan Rd., Nanshan Dist., Shenzhen, 518052, China

Manufacturer: SHENZHEN WLINK TECHNOLOGY CO., LTD.

Address of Manufacturer: 2A, F5 Building, TCL International E City, No.1001
Zhongshanyuan Rd., Nanshan Dist., Shenzhen, 518052, China

Equipment Under Test (EUT)

Product Name: Industrial 3G/4G Cellular Router

Model No.: WL-R210

Applicable standards: ETSI EN 300 328 V2.2.2 (2019-07)

Date of sample receipt: September 27, 2021

Date of Test: September 28, 2021-October 09, 2021

Date of report issue: October 09, 2021

Test Result : PASS *

* In the configuration tested, the EUT detailed in this report complied with the standards specified above.

The CE mark as shown below can be used, under the responsibility of the manufacturer, after completion of an EC Declaration of Conformity and compliance with all relevant EC Directives. The protection requirements with respect to electromagnetic compatibility contained in Directive 2014/53/EU are considered.



Robinson Luo
Laboratory Manager




This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Report No.	Version No.	Date	Description
GTS201903000054E02	00	March 11, 2019	Original
GTS202109000200E02	01	October 09, 2021	Change adapter, address of applicant/ manufacturer; Add telecommunication port; Delete factory; Update the version of standards.

Prepared By:




Date:

October 09, 2021

Project Engineer

Check By:



Date:

October 09, 2021

Reviewer

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
5 GENERAL INFORMATION	5
5.1 GENERAL DESCRIPTION OF EUT	5
5.2 TEST MODE	6
5.3 TEST FACILITY	7
5.4 TEST LOCATION	7
5.5 DESCRIPTION OF SUPPORT UNITS	7
5.6 DEVIATION FROM STANDARDS	7
5.7 ABNORMALITIES FROM STANDARD CONDITIONS	7
5.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER	7
6 TEST INSTRUMENTS LIST	8
7 RADIO TECHNICAL SPECIFICATION IN ETSI EN 300 328	10
7.1 TEST ENVIRONMENT AND MODE	10
7.2 TRANSMITTER REQUIREMENT	11
7.2.1 RF Output Power	11
7.2.2 Power Spectral Density	15
7.2.3 Adaptivity	18
7.2.4 Occupied Channel Bandwidth	35
7.2.5 Transmitter unwanted emissions in the OOB domain	37
7.2.6 Transmitter unwanted emissions in the spurious domain	41
7.3 RECEIVER REQUIREMENT	46
7.3.1 Spurious Emissions	46
7.3.2 Receiver Blocking	51
8 TEST SETUP PHOTO	53
9 EUT CONSTRUCTIONAL DETAILS	53

4 Test Summary

Radio Spectrum Matter (RSM) Part of Tx					
Test	Test Requirement	Test method	Limit/Severity	Uncertainty	Result
RF Output Power	Clause 4.3.2.2	Clause 5.4.2.2	20dBm	±1.5dB	PASS
Power Spectral Density	Clause 4.3.2.3	Clause 5.4.3.2	10dBm/MHz	±3dB	PASS
Duty Cycle, Tx-sequence, Tx-gap	Clause 4.3.2.4	Clause 5.4.2.2.1.3	Clause 4.3.2.4.3	±5 %	N/A
Medium Utilisation (MU) factor	Clause 4.3.2.5	Clause 5.4.2.2.1.4	≤ 10%	±5 %	N/A
Adaptivity	Clause 4.3.2.6	Clause 5.4.6.2	Clause 4.3.2.6.2.2 & Clause 4.3.2.6.3.2 & Clause 4.3.2.6.4.2	--	PASS
Occupied Channel Bandwidth	Clause 4.3.2.7	Clause 5.4.7.2	Clause 4.3.2.7.3	±5 %	PASS
Transmitter unwanted emissions in the OOB domain	Clause 4.3.2.8	Clause 5.4.8.2	Clause 4.3.2.8.3	±3dB	PASS
Transmitter unwanted emissions in the spurious domain	Clause 4.3.2.9	Clause 5.4.9.2	Clause 4.3.2.9.3	±6dB	PASS
Radio Spectrum Matter (RSM) Part of Rx					
Receiver spurious emissions	Clause 4.3.2.10	Clause 5.4.10.2	Clause 4.3.2.10.3	±6dB	PASS
Receiver Blocking	Clause 4.3.2.11	Clause 5.4.11.2	Clause 4.3.2.11.4	--	PASS
Geo-location capability	Clause 4.3.2.12	--	--	--	N/A

Remark:

The EUT belongs to receiver category 1.

Tx: In this whole report Tx (or tx) means Transmitter.

Rx: In this whole report Rx (or rx) means Receiver.

Temperature (Uncertainty): ±1°C Humidity(Uncertainty): ±5%

Uncertainty: ± 3%(for DC and low frequency voltages)

5 General Information

5.1 General Description of EUT

Product Name:	Industrial 3G/4G Cellular Router
Model No.:	WL-R210
Operation Frequency:	2412MHz~2472MHz (802.11b/802.11g/802.11n(H20)) 2422MHz~2462MHz (802.11n(H40))
Channel numbers:	13 for 802.11b/802.11g/802.11n(HT20) 9 for 802.11n(HT40)
Channel separation:	5MHz
Modulation Technology: (IEEE 802.11b)	Direct Sequence Spread Spectrum(DSSS)
Modulation Technology: (IEEE 802.11g/802.11n)	Orthogonal Frequency Division Multiplexing(OFDM)
Antenna Type:	External Antenna
Antenna gain:	2.0dBi (declare by Applicant)
Power Supply:	Adapter: Model No.: SAW20-120-1500GD Input: AC 100-240V, 50/60Hz, 0.6A Output: DC 12.0V, 1.5A, 18.0W

WIFI Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	5	2432MHz	9	2452MHz	13	2472MHz
2	2417MHz	6	2437MHz	10	2457MHz		
3	2422MHz	7	2442MHz	11	2462MHz		
4	2427MHz	8	2447MHz	12	2467MHz		

The EUT operation in above frequency list, and used test software to control the EUT for staying in continuous transmitting and receiving mode. So test frequency is below:

Test channel	Frequency (MHz)	
	802.11b/802.11g/802.11n(HT20)	802.11n(HT40)
Lowest channel	2412MHz	2422MHz
Middle channel	2442MHz	2442MHz
Highest channel	2472MHz	2462MHz

5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
Receiving mode	Keep the EUT in receiving mode.

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.

Mode	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)
Data rate	1Mbps	6Mbps	6.5Mbps	13Mbps

5.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC—Registration No.: 381383**

Designation Number: CN5029

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files.

- **IC —Registration No.: 9079A**

CAB identifier: CN0091

The 3m Semi-

anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

- **NVLAP (LAB CODE:600179-0)**

Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP).

5.4 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102

Tel: 0755-27798480

Fax: 0755-27798960

5.5 Description of Support Units

The EUT has been tested as an independent unit.

5.6 Deviation from Standards

None.

5.7 Abnormalities from Standard Conditions

None.

5.8 Other Information Requested by the Customer

None.

6 Test Instruments List

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July. 02 2020	July. 01 2025
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June. 24 2021	June. 23 2022
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June. 24 2021	June. 23 2022
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	June. 24 2021	June. 23 2022
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June. 24 2021	June. 23 2022
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	June. 24 2021	June. 23 2022
9	Coaxial Cable	GTS	N/A	GTS211	June. 24 2021	June. 23 2022
10	Coaxial cable	GTS	N/A	GTS210	June. 24 2021	June. 23 2022
11	Coaxial Cable	GTS	N/A	GTS212	June. 24 2021	June. 23 2022
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June. 24 2021	June. 23 2022
13	Amplifier(2GHz-20GHz)	HP	84722A	GTS206	June. 24 2021	June. 23 2022
14	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June. 24 2021	June. 23 2022
15	Band filter	Amindeon	82346	GTS219	June. 24 2021	June. 23 2022
16	Power Meter	Anritsu	ML2495A	GTS540	June. 24 2021	June. 23 2022
17	Power Sensor	Anritsu	MA2411B	GTS541	June. 24 2021	June. 23 2022
18	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	June. 24 2021	June. 23 2022
19	Splitter	Agilent	11636B	GTS237	June. 24 2021	June. 23 2022
20	Loop Antenna	ZHINAN	ZN30900A	GTS534	June. 24 2021	June. 23 2022
21	Breitband hornantenne	SCHWARZBECK	BBHA 9170	GTS579	Oct. 18 2020	Oct. 17 2021
22	Amplifier	TDK	PA-02-02	GTS574	Oct. 18 2020	Oct. 17 2021
23	Amplifier	TDK	PA-02-03	GTS576	Oct. 18 2020	Oct. 17 2021
24	PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	GTS578	June. 24 2021	June. 23 2022

RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	June. 24 2021	June. 23 2022
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 24 2021	June. 23 2022
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June. 24 2021	June. 23 2022
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	June. 24 2021	June. 23 2022
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	June. 24 2021	June. 23 2022
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	June. 24 2021	June. 23 2022
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	June. 24 2021	June. 23 2022
8	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	June. 24 2021	June. 23 2022

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Humidity/ Temperature Indicator	KTJ	TA328	GTS243	June. 24 2021	June. 23 2022
2	Barometer	ChangChun	DYM3	GTS255	June. 24 2021	June. 23 2022

7 Radio Technical Specification in ETSI EN 300 328

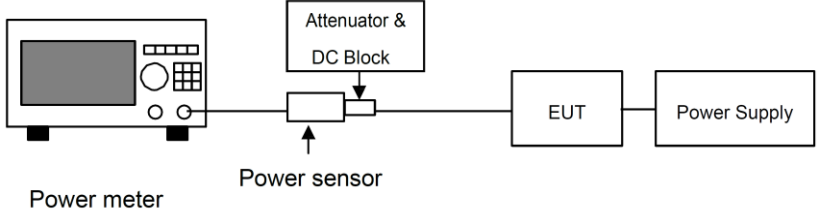
7.1 Test Environment and Mode

Test mode:			
Transmitting mode:		Keep the EUT in transmitting mode with modulation.	
Receiving mode		Keep the EUT in receiving mode.	
Operating Environment:			
Item	Normal condition	Extreme condition	
		NVHT	NVLT
Temperature	+25°C	+45°C	0°C
Humidity	20%-95%		
Atmospheric Pressure:	1008 mbar		

Setting	Value
Modulation	Other
Adaptive	Yes
Antenna Gain	2.0dBi
Nominal Channel Bandwidth	20MHz/40MHz
DUT Frequency not configurable	No
Frequency Low	2412MHz/2422MHz
Frequency Mid	2442MHz
Frequency High	2472MHz/2462MHz

7.2 Transmitter Requirement

7.2.1 RF Output Power

Test Requirement:	ETSI EN 300 328 clause 4.3.2.2
Test Method:	ETSI EN 300 328 clause 5.4.2.2.1.2
Limit:	20dBm
Test setup:	 <pre> graph LR PM[Power meter] --- PS[Power sensor] PS --- ABC[Attenuator & DC Block] ABC --- EUT[EUT] EUT --- PSUP[Power Supply] </pre>
Test procedure:	<p>Step 1:</p> <p>Use a fast power sensor suitable for 2,4 GHz and capable of 1 MS/s.</p> <p>Use the following settings:</p> <ul style="list-style-type: none"> - Sample speed 1 MS/s or faster. - The samples must represent the power of the signal. - Measurement duration: For non-adaptive equipment: equal to the observation period defined in clauses 4.3.1.3.2 or 4.3.2.4.2. For adaptive equipment, the measurement duration shall be long enough to ensure a minimum number of bursts (at least 10) are captured. <p>For adaptive equipment, to increase the measurement accuracy, a higher number of bursts may be used.</p> <p>Step 2:</p> <p>For conducted measurements on devices with one transmit chain:</p> <ul style="list-style-type: none"> -Connect the power sensor to the transmit port, sample the transmit signal and store the raw data. Use these stored samples in all following steps. <p>For conducted measurements on devices with multiple transmit chains:</p> <ul style="list-style-type: none"> -Connect one power sensor to each transmit port for a synchronous measurement on all transmit ports. -Trigger the power sensors so that they start sampling at the same time. Make sure the time difference between the samples of all sensors is less than 500ns. -For each individual sampling point(time domain), sum the coincident power samples of all ports and store them. Use these summed samples in all following steps. <p>Step 3:</p> <p>Find the start and stop times of each burst in the stored measurement samples.</p> <p>The start and stop times are defined as the points where the power is at least 30 dB below the highest value of the stored samples in step 2.</p> <p>In case of insufficient dynamic range, the value of 30dB may need to be reduced appropriately.</p> <p>Step 4:</p> <p>Between the start and stop times of each individual burst calculate the</p>

	<p>RMS power over the burst using the formula below. Save these P_{burst} values, as well as the start and stop times for each burst.</p> $P_{burst} = \frac{1}{k} \sum_{n=1}^k P_{sample}(n)$ <p>With “k” being the total number of samples and “n” the actual sample number</p> <p>Step 5:</p> <p>The highest of all P_{burst} values (value “A” in dBm) will be used for maximum e.i.r.p. calculations.</p> <p>Step 6:</p> <p>Add the (stated) antenna assembly gain “G” in dBi of the individual antenna.</p> <p>If applicable, add the additional beamforming gain “Y” in dB.</p> <p>If more than one antenna assembly is intended for this power setting, the maximum overall antenna gain (G or G + Y) shall be used.</p> <p>The RF Output Power (P) shall be calculated using the formula below: $P = A + G + Y$</p> <p>Step 7:</p> <p>This value, which shall comply with the limit given in clause 4.3.1.2.3 or clause 4.3.2.2.3, shall be recorded in the test report.</p>
Measurement Record:	Uncertainty: 0.65dB
Test Instruments:	See section 6.0
Test mode:	Transmitting mode

Measurement Data

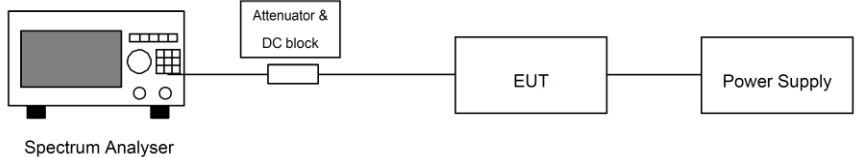
802.11b mode						
Test conditions	Channel	Burst RMS power (dBm)	Antenna Gain(dBi)	Calculated Power (dBm)	Limit (dBm)	Result
Normal	Lowest	16.25	2.00	18.25	20	Pass
	Middle	16.18	2.00	18.18		
	Highest	16.22	2.00	18.22		
NVHT	Lowest	16.18	2.00	18.18		
	Middle	16.08	2.00	18.08		
	Highest	16.12	2.00	18.12		
NVLT	Lowest	16.23	2.00	18.23		
	Middle	16.16	2.00	18.16		
	Highest	16.20	2.00	18.20		
802.11g mode						
Test conditions	Channel	Burst RMS power (dBm)	Antenna Gain(dBi)	Calculated Power (dBm)	Limit (dBm)	Result
Normal	Lowest	15.76	2.00	17.76	20	Pass
	Middle	15.68	2.00	17.68		
	Highest	15.62	2.00	17.62		
NVHT	Lowest	15.69	2.00	17.69		
	Middle	15.58	2.00	17.58		
	Highest	15.52	2.00	17.52		
NVLT	Lowest	15.74	2.00	17.74		
	Middle	15.66	2.00	17.66		
	Highest	15.60	2.00	17.60		

802.11n(HT20) mode						
Test conditions	Channel	Burst RMS power (dBm)	Antenna Gain(dBi)	Calculated Power (dBm)	Limit (dBm)	Result
Normal	Lowest	15.64	2.00	17.64	20	Pass
	Middle	15.54	2.00	17.54		
	Highest	15.53	2.00	17.53		
NVHT	Lowest	15.57	2.00	17.57		
	Middle	15.44	2.00	17.44		
	Highest	15.43	2.00	17.43		
NVLT	Lowest	15.62	2.00	17.62		
	Middle	15.52	2.00	17.52		
	Highest	15.51	2.00	17.51		
802.11n(HT40) mode						
Test conditions	Channel	Burst RMS power (dBm)	Antenna Gain(dBi)	Calculated Power (dBm)	Limit (dBm)	Result
Normal	Lowest	12.59	2.00	14.59	20	Pass
	Middle	12.48	2.00	14.48		
	Highest	12.42	2.00	14.42		
NVHT	Lowest	12.52	2.00	14.52		
	Middle	12.38	2.00	14.38		
	Highest	12.32	2.00	14.32		
NVLT	Lowest	12.57	2.00	14.57		
	Middle	12.46	2.00	14.46		
	Highest	12.40	2.00	14.40		

Remark:1>. Volt= Voltage, Temp= Temperature

2>. Antenna Gain=2.0dBi

7.2.2 Power Spectral Density

Test Requirement:	ETSI EN 300 328 clause 4.3.2.3
Test Method:	ETSI EN 300 328 clause 5.4.3.2.1
Limit:	10dBm/MHz
Test setup:	 <pre> graph LR SA[Spectrum Analyser] --- A[Attenuator & DC block] A --- EUT[EUT] EUT --- PS[Power Supply] </pre>
Test procedure:	<p>Step 1: Connect the UUT to the spectrum analyser and use the following settings:</p> <p>Start Frequency: 2400 MHz Stop Frequency: 2483.5 MHz Resolution BW: 10 kHz Video BW: 30 kHz Sweep Points: > 8350</p> <p>For spectrum analysers not supporting this number of sweep points, the frequency band may be segmented.</p> <p>Detector: RMS Trace Mode: Max Hold Sweep time: 10s; the sweep time may be increased further until a value where the sweep time has no impact on the RMS value of the signal</p> <p>For non-continuous signals, wait for the trace to stabilize. Save the (trace data) set to a file.</p> <p>Step 2: For conducted measurements on smart antenna systems using either operating mode 2 or 3 (see clause 5.3.2.2), repeat the measurement for each of the transmit ports. For each sampling point(frequency domain) , add up the coincident power values(in mW) for the different transmit chains and use this as the new data set.</p> <p>Step 3: Add up the values for power for all the samples in the file using the formula below.</p> $P_{Sum} = \sum_{n=1}^k P_{sample}(n)$ <p>With “k” being the total number of samples and “n” the actual sample Number.</p> <p>Step 4: Normalize the individual values for power(in dBm) so that the sum is equal to the RF output Power (e.i.r.p.) measured in clause 5.4.2 and save the corrected data. The following formulas can be used:</p>

	$C_{Corr} = P_{Sum} - P_{e.i.r.p.}$ $P_{Samplecorr}(n) = P_{Sample}(n) - C_{Corr}$ <p>With "n" being the actual sample number</p> <p>Step 5: Starting from the first sample $P_{samplecorr(n)}$ (lowest frequency), add up the power(in mW) of the following samples representing a 1 MHz segment and record the results for power and position (i.e. sample #1 to #100). This is the Power Spectral Density (e.i.r.p.) for the first 1 MHz segment which shall be recorded.</p> <p>Step 6: Shift the start point of the samples added up in step 5 by one sample and repeat the procedure in step 5 (i.e. sample #2 to #101).</p> <p>Step 7: Repeat step 6 until the end of the data set and record the Power Spectral Density values for each of the 1 MHz segments. From all the recorded results, the highest value is the maximum Power Spectral Density for the UUT. This value, which shall comply with the limit given in clause 4.3.2.3.3, shall be recorded in the test report.</p>
Measurement Record:	Uncertainty: 1.31dB
Test Instruments:	See section 6.0
Test mode:	Transmitting mode

Measurement Data

802.11b mode			
Channel	Power Spectral Density (dBm/MHz)	Limit (dBm/MHz)	Result
CH 1	6.93	10.00	Pass
CH 7	6.81		
CH 13	6.76		
802.11g mode			
Channel	Power Spectral Density (dBm/MHz)	Limit (dBm/MHz)	Result
CH 1	3.93	10.00	Pass
CH 7	3.79		
CH 13	3.75		
802.11n-HT20 mode			
Channel	Power Spectral Density (dBm/MHz)	Limit (dBm/MHz)	Result
CH 1	3.91	10.00	Pass
CH 7	3.76		
CH 13	3.62		
802.11n-HT40 mode			
Channel	Power Spectral Density (dBm/MHz)	Limit (dBm/MHz)	Result
CH 3	0.33	10.00	Pass
CH 7	0.26		
CH 11	0.21		

7.2.3 Adaptivity

Test Requirement:	ETSI EN 300 328 clause 4.3.2.6												
Test Method:	ETSI EN 300 328 clause 5.3.7.2.1												
Limit:	Clause 4.3.2.6.2.2 & Clause 4.3.2.6.3.2 & Clause 4.3.2.6.4.2												
Test setup:	<pre> graph LR UUT[UUT] <--> SC1[Splitter/Combiner] SC1 --> SA[Spectrum Analyzer] SC1 --> DC[Direct Coupler] DC --> ATT[ATT.] ATT --> CD[Companion Device] SG1[Signal Generator Interferer] --> SC2[Splitter/Combiner] SG2[Signal Generator Blocker] --> SC2 SC2 --> DC </pre>												
Test procedure:	<p>1. Adaptive Frequency Hopping equipment using DAA</p> <p>The different steps below define the procedure to verify the efficiency of the DAA based adaptive mechanisms for frequency hopping equipment. These mechanisms are described in clause 4.3.1.7.</p> <p>For systems using multiple receive chains only one chain (antenna port) need to be tested. All other receiver inputs shall be terminated.</p> <p>Step 1:</p> <p>The UUT may connect to a companion device during the test. The interference signal generator, the blocking signal generator, the spectrum analyser, the UUT and the companion device are connected using a set-up equivalent to the example given by figure 5, although the interference and blocking signal generators do not generate any signals at this point in time. The spectrum analyser is used to monitor the transmissions of the UUT in response to the interfering and the blocking signals.</p> <p>For the hopping frequency to be tested, adjust the received signal level (wanted signal from the companion device) at the UUT to the value defined in table 2 and table 3 (clause 4).</p> <p>Testing of Unidirectional equipment does not require a link to be established with a companion device.</p> <p>The analyzer shall be set as follows:</p> <table> <tr> <td>RBW:</td><td>use next available RBW setting below the measured Occupied Channel Bandwidth</td></tr> <tr> <td>Filter type:</td><td>Channel Filter</td></tr> <tr> <td>VBW:</td><td>≥ RBW</td></tr> <tr> <td>Detector Mode:</td><td>RMS</td></tr> <tr> <td>Centre Frequency:</td><td>Equal to the hopping frequency to be tested</td></tr> <tr> <td>Span:</td><td>0Hz</td></tr> </table>	RBW:	use next available RBW setting below the measured Occupied Channel Bandwidth	Filter type:	Channel Filter	VBW:	≥ RBW	Detector Mode:	RMS	Centre Frequency:	Equal to the hopping frequency to be tested	Span:	0Hz
RBW:	use next available RBW setting below the measured Occupied Channel Bandwidth												
Filter type:	Channel Filter												
VBW:	≥ RBW												
Detector Mode:	RMS												
Centre Frequency:	Equal to the hopping frequency to be tested												
Span:	0Hz												

	<p>Sweep time: >Channel Occupancy Time of the UUT. If the Channel Occupancy Time is non-contiguous (non-LBT based equipment), the sweep time shall be sufficient to cover the period over which the Channel Occupancy Time is spread out.</p> <p>Trace Mode: Clear/Write</p> <p>Trigger Mode: Video</p> <p>Step 2:</p> <p>Configure the UUT for normal transmissions with a sufficiently high payload to resulting in a minimum transmitter activity ratio(TxOn+TxOff)) of 0.3.Where this is not possible, the UUT shall be configured to the maximum payload possible.</p> <p>Using the procedure defined in clause 5.4.6.2.1.5, it shall be verified that, for equipment with a dwell time greater than the maximum allowable Channel Occupancy Time, the UUT complies with the maximum Channel Occupancy Time and minimum Idle Period defined in clauses 4.3.1.7.2.2 and 4.3.1.7.3.2.</p> <p>Step 3: Adding the interference signal</p> <p>An interference signal as defined in clause B.6 is injected centred on the hopping frequency being tested. The Power Spectral Density level(at the input of the UUT) of this interference signal shall be equal to the detection threshold defined in clauses 4.3.1.7.2.2 or 4.3.1.7.3.2.</p> <p>Step 4: Verification of reaction to the interference signal</p> <p>The spectrum analyser shall be used to monitor the transmissions of the UUT on the selected hopping frequency with the interfering signal injected. This may require the spectrum analyser sweep to be triggered by the start of the interfering signal.</p> <p>Using the procedure defined in clause 5.4.6.2.1.5, it shall be verified that:</p> <p>i) The UUT shall stop transmissions on the hopping frequency being tested.</p> <p>The UUT is assumed to stop transmissions on this hopping frequency within a period equal to the maximum Channel Occupancy Time defined in clauses 4.3.1.7.2.2 or clause 4.3.1.7.3.2 As stated in clause 4.3.1.7.3.2, the Channel Occupancy Time for non-LBT based frequency hopping systems may be non-contiguous.</p> <p>ii) For LBT based frequency hopping equipment, apart from Short Control Signalling Transmissions (see iii) below), there shall be no subsequent transmissions on this hopping frequency, as long as the interference signal remains present.</p> <p>For non-LBT based frequency hopping equipment, apart from Short Control Signalling Transmissions (see iii) below), there shall be no subsequent transmissions on this hopping frequency for a (silent) period defined in clause 4.3.1.7.3.2 step 2. After that, the UUT may have normal transmissions again for the duration of a single Channel Occupancy Time period (which may be non-contiguous). Because the interference signal is still present, another silent period as defined in clause 4.3.1.7.3.2 step 2 needs to be included. This sequence is repeated as long as the interfering signal is present.</p> <p>In case of overlapping channels, transmissions in adjacent channels may generate transmission bursts on the channel being investigated, however they will have a lower amplitude as on-channel transmissions. Care should be taken to only evaluate the on-channel transmissions.</p>
--	---

	<p>The Time Domain Power Option of the analyser may be used to measure the RMS power of the individual bursts to distinguish on-channel transmissions from transmissions on adjacent channels. In some cases, the RBW may need to be reduced.</p> <p>To verify that the UUT is not resuming normal transmissions as long as the interference signal is present, the monitoring time may need to be 60s or more.</p> <p>iii) The UUT may continue to have Short Control Signalling Transmissions on the hopping frequency being tested while the interference signal is present. These transmissions shall comply with the limits defined in clause 4.3.1.7.4.2.</p> <p>The verification of the Short Control Signalling transmissions may require the analyser settings to be changed (e.g. sweep time).</p> <p>iv) Alternatively, the equipment may switch to a non-adaptive mode.</p> <p>Step 5: Adding the unwanted signal</p> <p>With the interfering signal present, a 100 % duty cycle CW signal is inserted as the unwanted signal. The frequency and the level are provided in table 2 of clause 4.3.1.7.2.2, step 6 or table 3 of clause 4.3.1.7.3.2, step 6.</p> <p>The spectrum analyser shall be used to monitor the transmissions of the UUT on the selected hopping frequency. This may require the spectrum analyser sweep to be triggered by the start of the unwanted signal.</p> <p>Using the procedure defined in clause 5.4.6.2.1.5, it shall be verified that:</p> <p>i) The UUT shall not resume normal transmissions on the hopping frequency being tested as long as both the interference and unwanted signals remain present</p> <p>To verify that the UUT is not resuming normal transmissions as long as the interference and blocking signals are present, the monitoring time may need to be 60s or more. If transmissions are detected during this period, the settings of the analyser may need to be adjusted to allow an accurate assessment to verify the transmissions comply with the limits for Short Control Signalling Transmissions.</p> <p>ii) The UUT may continue to have Short Control Signalling Transmissions on the hopping frequency being tested while the interference and unwanted signal are present. These transmissions shall comply with the limits defined in clause 4.3.1.7.4.2</p> <p>The verification of the Short Control Signalling transmissions may require the analyser settings to be changed (e.g. sweep time).</p> <p>Step 6: Removing the interference and unwanted signal</p> <p>On removal of the interference and unwanted signal, the UUT is allowed to re-include any channel previously marked as unavailable; however, for non-LBT based equipment, it shall be verified that this shall only be done after the period defined in clause 4.3.1.7.3.2 point 2.</p> <p>Step 7:</p> <p>The steps 2 to 6 shall be repeated for each of the hopping frequencies to be tested.</p> <p>2. Non-LBT based adaptive equipment using modulations other than FHSS</p> <p>The different steps below define the procedure to verify the efficiency of the non-LBT based DAA adaptive mechanism of equipment using wide band modulations other than FHSS.</p> <p>For systems using multiple receive chains only one chain (antenna port) need to be tested. All other receiver inputs shall be terminated.</p>
--	---

Step 1:

The UUT shall connect to a companion device during the test. The interference signal generator, the unwanted signal generator, the spectrum analyser, the UUT and the companion device are connected using a set-up equivalent to the example given by figure 5 although the interference and unwanted signal generator do not generate any signals at this point in time. The spectrum analyser is used to monitor the transmissions of the UUT in response to the interfering and the unwanted signals.

Adjust the received signal level (wanted signal from the companion device) at the UUT to the value defined in table table 9 (clause 4.3.2.6.2.2).

Testing of Unidirectional equipment does not require a link to be established with a companion device.

The analyzer shall be set as follows:

RBW:	≥ Occupied Channel Bandwidth (if the analyser does not support this setting, the highest available setting shall be used)
VBW:	3 × RBW (if the analyser does not support this setting, the highest available setting shall be used)
Detector Mode:	RMS
Centre Frequency:	Equal to the hopping frequency to be tested
Span:	0Hz
Sweep time:	> Channel Occupancy Time of the UUT
Trace Mode:	Clear/Write
Trigger Mode:	Video

Step 2:

Configure the UUT for normal transmissions with a sufficiently high payload resulting in a minimum transmitter activity ratio (TxOn+TxOff) of 0.3 .Where this is not possible , the UUT shall be configured to the maximum payload possible.

Using the procedure defined in clause 5.3.7.2.1.4, it shall be verified that the UUT complies with the maximum Channel Occupancy Time and minimum Idle Period defined in clause 4.3.2.6.2.2.

Step 3: Adding the interference signal

An interference signal as defined in clause B.6 is injected centred on the current operating channel of the UUT. The Power Spectral Density level(at the input of the UUT) of this interference signal shall be equal to the detection threshold defined in clauses 4.3.2.6.2.2 step 5).

Step 4: Verification of reaction to the interference signal

The spectrum analyser shall be used to monitor the transmissions of the UUT on the selected operating channel with the interfering signal injected. This may require the spectrum analyser sweep to be triggered by the start of the interfering signal.

Using the procedure defined in clause 5.4.6.2.1.5, it shall be verified that:

- i) The UUT shall stop transmissions on the current operating channel being tested.

The UUT is assumed to stop transmissions within a period equal to the maximum Channel Occupancy Time defined in clause 4.3.2.6.2.2 step 4.

- ii) Apart from Short Control Signalling Transmissions (see iii) below),

	<p>there shall be no subsequent transmissions on this operating channel for a (silent) period defined in clause 4.3.2.6.2.2 step 2. After that, the UUT may have normal transmissions again for the duration of a single Channel Occupancy Time period. Because the interference signal is still present, another silent period as defined in clause 4.3.2.6.2.2 step 2 needs to be included. This sequence is repeated as long as the interfering signal is present.</p> <p>To verify that the UUT is not resuming normal transmissions as long as the interference signal is present, the monitoring time may need to be 60 s or more.</p> <p>iii) The UUT may continue to have Short Control Signalling Transmissions on the operating channel while the interference signal is present. These transmissions shall comply with the limits defined in clause 4.3.2.6.4.2.</p> <p>The verification of the Short Control Signalling transmissions may require the analyser settings to be changed (e.g. sweep time).</p> <p>iv) Alternatively, the equipment may switch to a non-adaptive mode.</p> <p>Step 5: Adding the unwanted signal</p> <p>With the interfering signal present, a 100 % duty cycle CW signal is inserted as the unwanted signal. The frequency and the level are provided in table 9 of clause 4.3.2.6.2.2.</p> <p>The spectrum analyser shall be used to monitor the transmissions of the UUT on the selected operating channel. This may require the spectrum analyser sweep to be triggered by the start of the unwanted signal.</p> <p>Using the procedure defined in clause 5.4.6.2.1.5, it shall be verified that:</p> <p>i) The UUT shall not resume normal transmissions on the current operating channel as long as both the interference and blocking signals remain present.</p> <p>To verify that the UUT is not resuming normal transmissions as long as the interference and blocking signals are present, the monitoring time may need to be 60 s or more.</p> <p>ii) The UUT may continue to have Short Control Signalling Transmissions on the operating channel while the interference and unwanted signals are present. These transmissions shall comply with the limits defined in clause 4.3.2.6.4.2.</p> <p>The verification of the Short Control Signalling transmissions may require the analyser settings to be changed (e.g. sweep time).</p> <p>Step 6: Removing the interference and unwanted signal</p> <p>On removal of the interference and unwanted signal the UUT is allowed to start transmissions again on this channel however, it shall be verified that this shall only be done after the period defined in clause 4.3.2.6.2.2 step 2.</p> <p>Step 7:</p> <p>The steps 2 to 6 shall be repeated for each of the frequencies to be tested.</p> <p>3. LBT based adaptive equipment using modulations other than FHSS</p> <p>Step 1 to step 7 below define the procedure to verify the efficiency of the LBT based adaptive mechanism of equipment using wide band modulations other than FHSS. This method can be applied on Load Based Equipment and Frame Based Equipment.</p> <p>Step 1:</p> <p>The UUT may connect to a companion device during the test. The interference signal generator, the unwanted signal generator, the spectrum analyser, the UUT and the companion device are connected using a set-up equivalent to the example given by figure 5 although the interference and unwanted signal generator do not generate any signals at this point in time.</p>
--	--

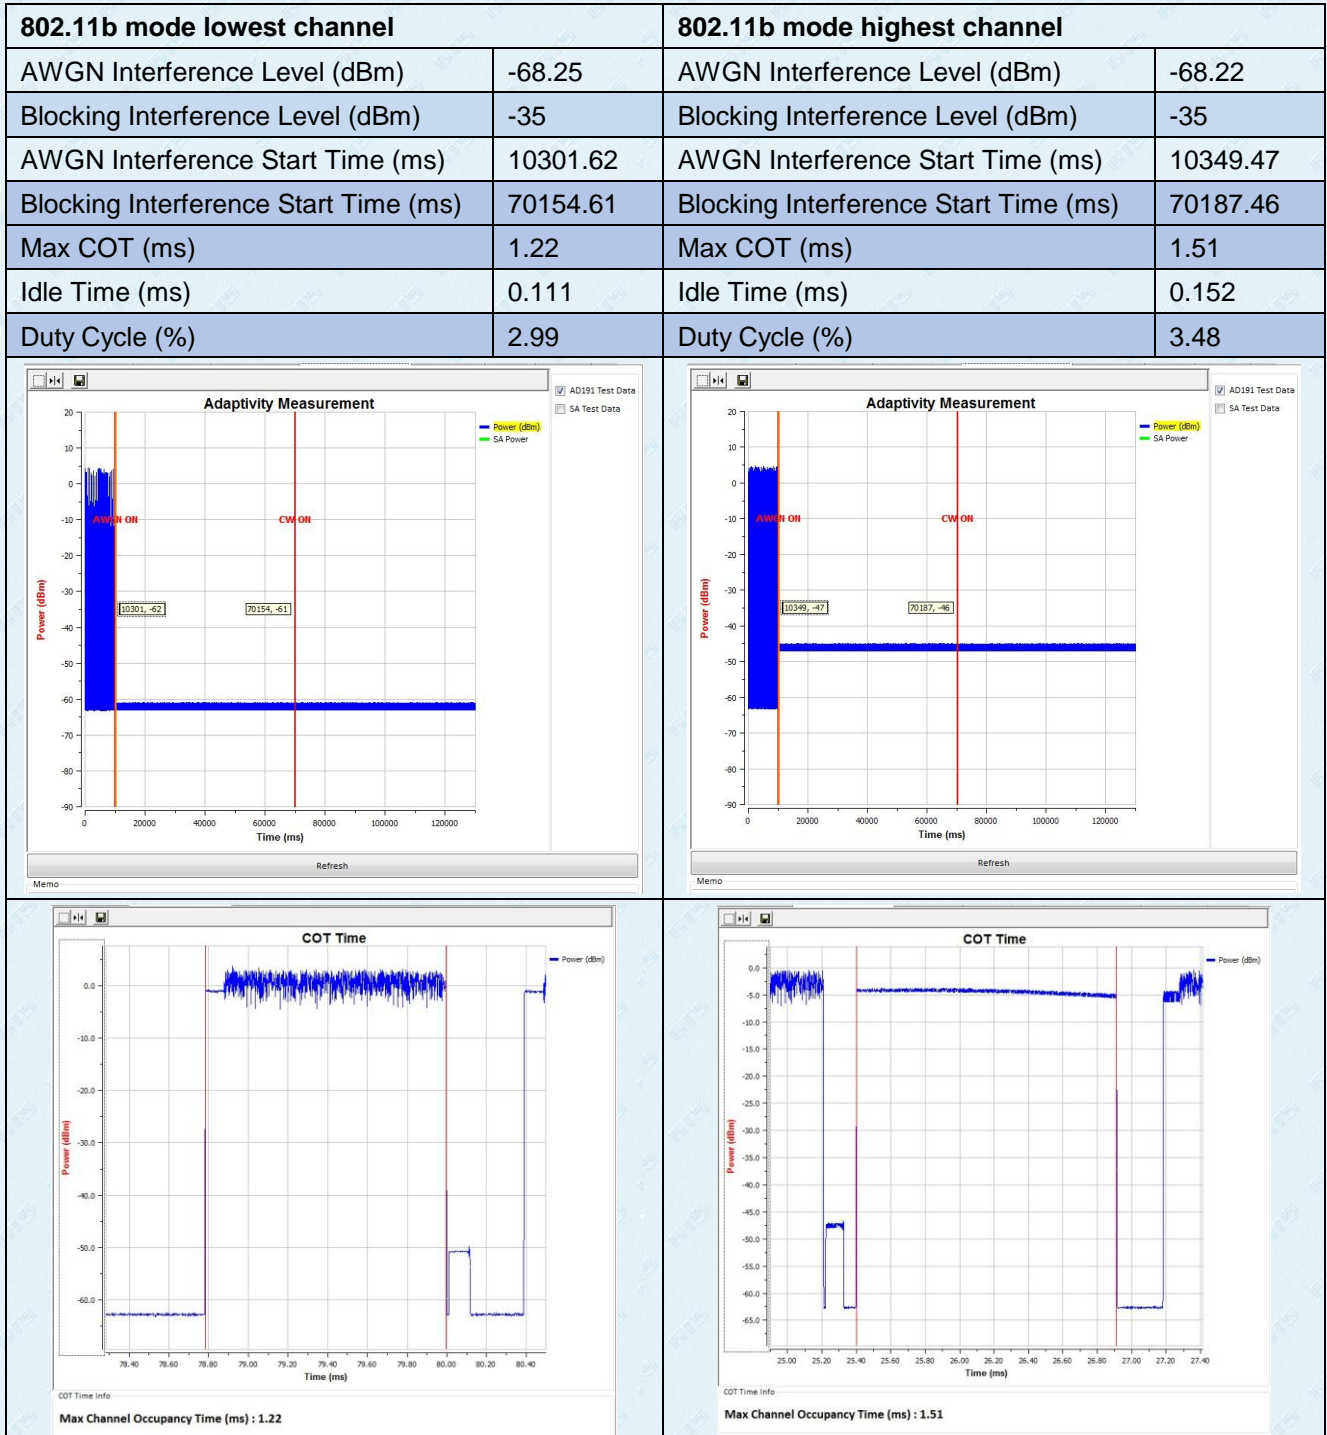
	<p>The spectrum analyser is used to monitor the transmissions of the UUT in response to the interfering and the unwanted signals.</p> <p>Adjust the received signal level (wanted signal from the companion device) at the UUT to the value defined in table 10 (clause 4.3.2.6.3.2.2) for Frame Based Equipment or in table 11 (clause 4.3.2.6.3.2.3) for Load Based Equipment.</p> <p>Testing of Unidirectional equipment does not require a link to be established with a companion device.</p> <p>The analyzer shall be set as follows:</p> <table border="0"> <tr> <td>RBW:</td><td>≥ Occupied Channel Bandwidth (if the analyser does not support this setting, the highest available setting shall be used)</td></tr> <tr> <td>VBW:</td><td>3 × RBW (if the analyser does not support this setting, the highest available setting shall be used)</td></tr> <tr> <td>Detector Mode:</td><td>RMS</td></tr> <tr> <td>Centre Frequency:</td><td>Equal to the centre frequency of the operating channel</td></tr> <tr> <td>Span:</td><td>0Hz</td></tr> <tr> <td>Sweep time:</td><td>> maximum Channel Occupancy Time</td></tr> <tr> <td>Trace Mode:</td><td>Clear Write</td></tr> <tr> <td>Trigger Mode:</td><td>Video</td></tr> </table> <p>Step 2:</p> <p>Configure the UUT for normal transmissions with a sufficiently high payload resulting in a minimum transmitter activity ratio (TxOn / (TxOn + TxOff)) of 0.3. Where this is not possible, the UUT shall be configured to the maximum payload possible.</p> <p>For Frame Based Equipment, using the procedure defined in clause 5.4.6.2.1.5, it shall be verified that the UUT complies with the maximum Channel Occupancy Time and minimum Idle Period defined in clause 4.3.2.6.3.2.2 step 3). When measuring the Idle Period of the UUT, it shall not include the transmission time of the companion device.</p> <p>For Load Based equipment, using the procedure defined in clause 5.4.6.2.1.5, it shall be verified that the UUT complies with the maximum Channel Occupancy Time and minimum Idle Period defined in clause 4.3.2.6.3.2.3, step 2 and step 3. When measuring the Idle Period of the UUT, it shall not include the transmission time of the companion device</p> <p>For the purpose of testing Load Based Equipment referred to in the first paragraph of clause 4.3.2.6.3.2.3 (IEEE 802.11™ [i.3] or IEEE 802.15.4™ [i.4] equipment), the limits to be applied for the minimum Idle Period and the maximum Channel Occupancy Time are the same as defined for other types of Load Based Equipment (see clause 4.3.2.6.3.2.3 step 2) and step 3). The Idle Period is considered to be equal to the CCA or Extended CCA time defined in clause 4.3.2.6.3.2.3 step 1) and step 2).</p> <p>Step 3: Adding the interference signal</p> <p>An interference signal as defined in clause B.7 is injected on the current operating channel of the UUT. The power spectral density level (at the input of the UUT) of this interference signal shall be equal to the detection threshold defined in clause 4.3.2.6.3.2.2 step 5) (frame based equipment) or clause 4.3.2.6.3.2.3 step 5) (load based equipment).</p>	RBW:	≥ Occupied Channel Bandwidth (if the analyser does not support this setting, the highest available setting shall be used)	VBW:	3 × RBW (if the analyser does not support this setting, the highest available setting shall be used)	Detector Mode:	RMS	Centre Frequency:	Equal to the centre frequency of the operating channel	Span:	0Hz	Sweep time:	> maximum Channel Occupancy Time	Trace Mode:	Clear Write	Trigger Mode:	Video
RBW:	≥ Occupied Channel Bandwidth (if the analyser does not support this setting, the highest available setting shall be used)																
VBW:	3 × RBW (if the analyser does not support this setting, the highest available setting shall be used)																
Detector Mode:	RMS																
Centre Frequency:	Equal to the centre frequency of the operating channel																
Span:	0Hz																
Sweep time:	> maximum Channel Occupancy Time																
Trace Mode:	Clear Write																
Trigger Mode:	Video																

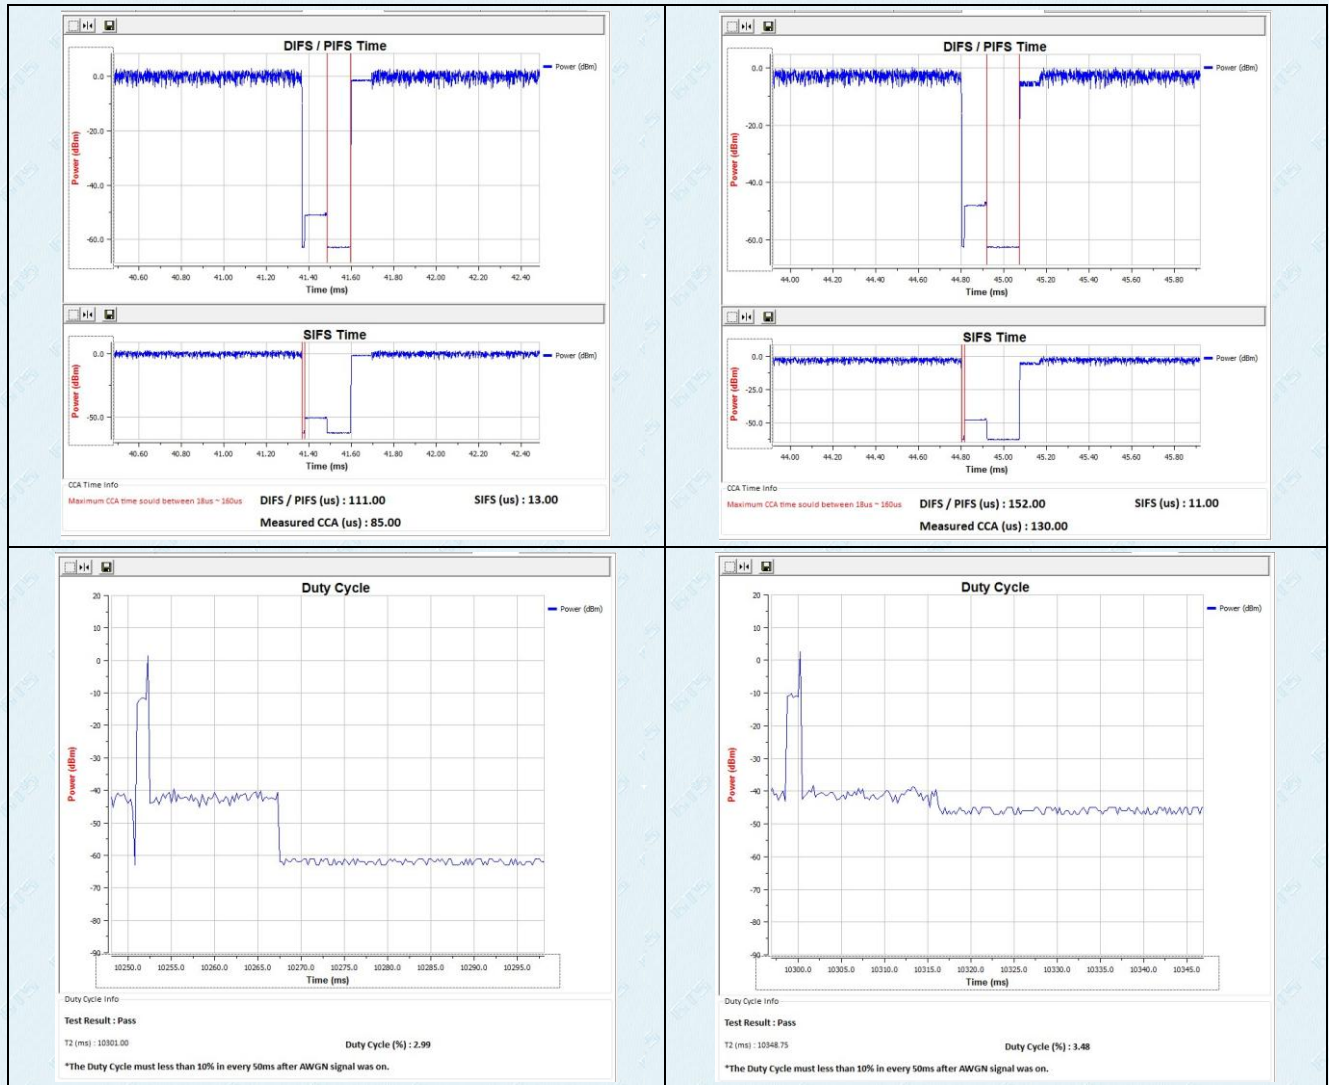
	<p>Step 4: Verification of reaction to the interference signal</p> <p>The spectrum analyser shall be used to monitor the transmissions of the UUT on the selected operating channel with the interfering signal injected. This may require the spectrum analyser sweep to be triggered by the start of the interfering signal.</p> <p>Using the procedure defined in clause 5.4.6.2.1.5, it shall be verified that:</p> <ul style="list-style-type: none"> i) The UUT shall stop transmissions on the current operating channel. <p>The UUT is assumed to stop transmissions within a period equal to the maximum Channel Occupancy Time defined in clause 4.3.2.6.3.2.2 (frame based equipment) or clause 4.3.2.6.3.2.3 (load based equipment).</p> <ul style="list-style-type: none"> ii) Apart from Short Control Signalling Transmissions, there shall be no subsequent transmissions while the interfering signal is present. <p>To verify that the UUT is not resuming normal transmissions as long as the interference signal is present, the monitoring time may need to be 60 s or more.</p> <ul style="list-style-type: none"> iii) The UUT may continue to have Short Control Signalling Transmissions on the operating channel while the interfering signal is present. These transmissions shall comply with the limits defined in clause 4.3.2.6.4.2. <p>The verification of the Short Control Signalling transmissions may require the analyser settings to be changed (e.g. sweep time).</p> <ul style="list-style-type: none"> iv) Alternatively, the equipment may switch to a non-adaptive mode. <p>Step 5: Adding the unwanted signal</p> <p>With the interfering signal present, a 100 % duty cycle CW signal is inserted as the unwanted signal. The frequency and the level are provided in table 6 of clause 4.3.2.11.3.</p> <p>The spectrum analyser shall be used to monitor the transmissions of the UUT on the selected operating channel. This may require the spectrum analyser sweep to be triggered by the start of the unwanted signal.</p> <p>Using the procedure defined in clause 5.3.7.2.1.4, it shall be verified that:</p> <ul style="list-style-type: none"> i) The UUT shall not resume normal transmissions on the current operating channel as long as both the interference and unwanted signals remain present. <p>To verify that the UUT is not resuming normal transmissions as long as the interference and unwanted signals are present, the monitoring time may need to be 60 s or more.</p> <ul style="list-style-type: none"> ii) The UUT may continue to have Short Control Signalling Transmissions on the operating channel while the interfering and unwanted signals are present. These transmissions shall comply with the limits defined in clause 4.3.2.6.4.2. <p>The verification of the Short Control Signalling transmissions may require the analyser settings to be changed (e.g. sweep time).</p> <p>Step 6: Removing the interference and unwanted signal</p> <p>On removal of the interference and unwanted signal the UUT is allowed to start transmissions again on this channel however this is not a requirement and therefore does not require testing.</p> <p>Step 7:</p> <p>The steps 2 to 6 shall be repeated for each of the frequencies to be tested.</p>
--	---

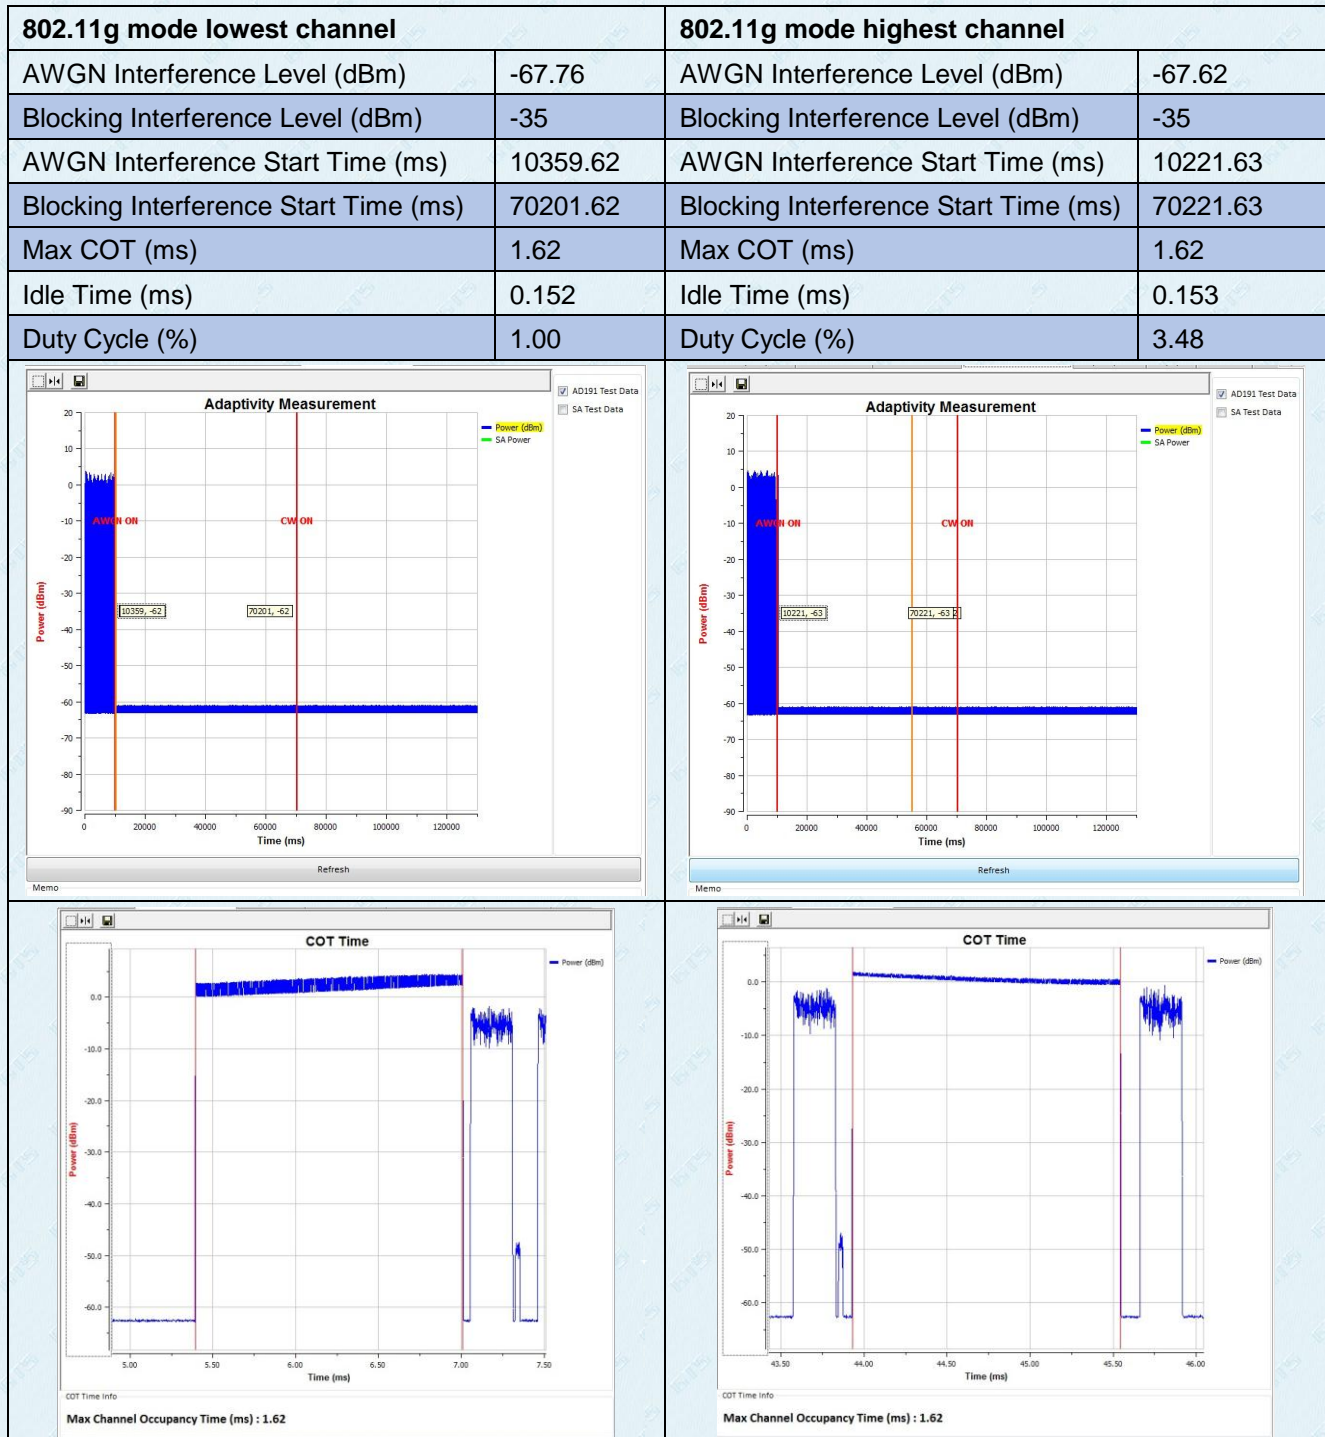
	<p>4. Generic test procedure for measuring channel/frequency usage</p> <p>This is a generic test method to evaluate transmissions on the operating (hopping) frequency being investigated. This test is performed as part of the procedures described in clause 5.4.6.2.1.2 to clause 5.4.6.2.1.4.</p> <p>The test procedure shall be as follows:</p> <p>Step 1:</p> <p>The analyzer shall be set as follows:</p> <p>Centre Frequency: Equal to the hopping frequency or centre frequency of the channel being investigated</p> <p>Frequency Span: 0Hz</p> <p>RBW: ~ 50 % of the Occupied Channel Bandwidth (if the analyser does not support this setting, the highest available setting shall be used)</p> <p>VBW: ≥ RBW (if the analyser does not support this setting, the highest available setting shall be used)</p> <p>Detector Mode: RMS</p> <p>Sweep time: > the Channel Occupancy Time. It shall be noted that if the Channel Occupancy Time is non-contiguous (for non-LBT based Frequency Hopping Systems), the sweep time shall be sufficient to cover the period over which the Channel Occupancy Time is spread out</p> <p>Number of sweep points:</p> <p>The time resolution has to be sufficient to meet the maximum measurement uncertainty of 5 % for the period to be measured. In most cases, the Idle Period is the shortest period to be measured and thereby defining the time resolution. If the Channel Occupancy Time is non-contiguous (non-LBT based Frequency Hopping Systems), there is no Idle Period to be measured and therefore the time resolution can be increased (e.g. to 5 % of the dwell time) to cover the period over which the Channel Occupancy Time is spread out, without resulting in too high a number of sweep points for the analyzer.</p> <p>EXAMPLE 1: For a Channel Occupancy Time of 60 ms, the minimum Idle Period is 3 ms, hence the minimum time resolution should be < 150 µs.</p> <p>EXAMPLE 2: For a Channel Occupancy Time of 2 ms, the minimum Idle Period is 100 µs, hence the minimum time resolution should be < 5 µs.</p> <p>EXAMPLE 3: In case of a system using the non-contiguous Channel Occupancy Time approach (40 ms) and using 79 hopping frequencies with a dwell time of 3,75 ms, the total period over which the Channel Occupancy Time is spread out is 3,2 s. With a time resolution 0,1875 ms (5 % of the dwell time), the minimum number of sweep points is ~ 17 000.</p> <p>Trace mode: Clear / Write</p> <p>Trigger: Video</p> <p>In case of Frequency Hopping Equipment, the data points resulting from transmissions on the hopping frequency being investigated are assumed to have much higher levels compared to data points resulting from transmissions on adjacent hopping frequencies. If a clear determination</p>
--	--

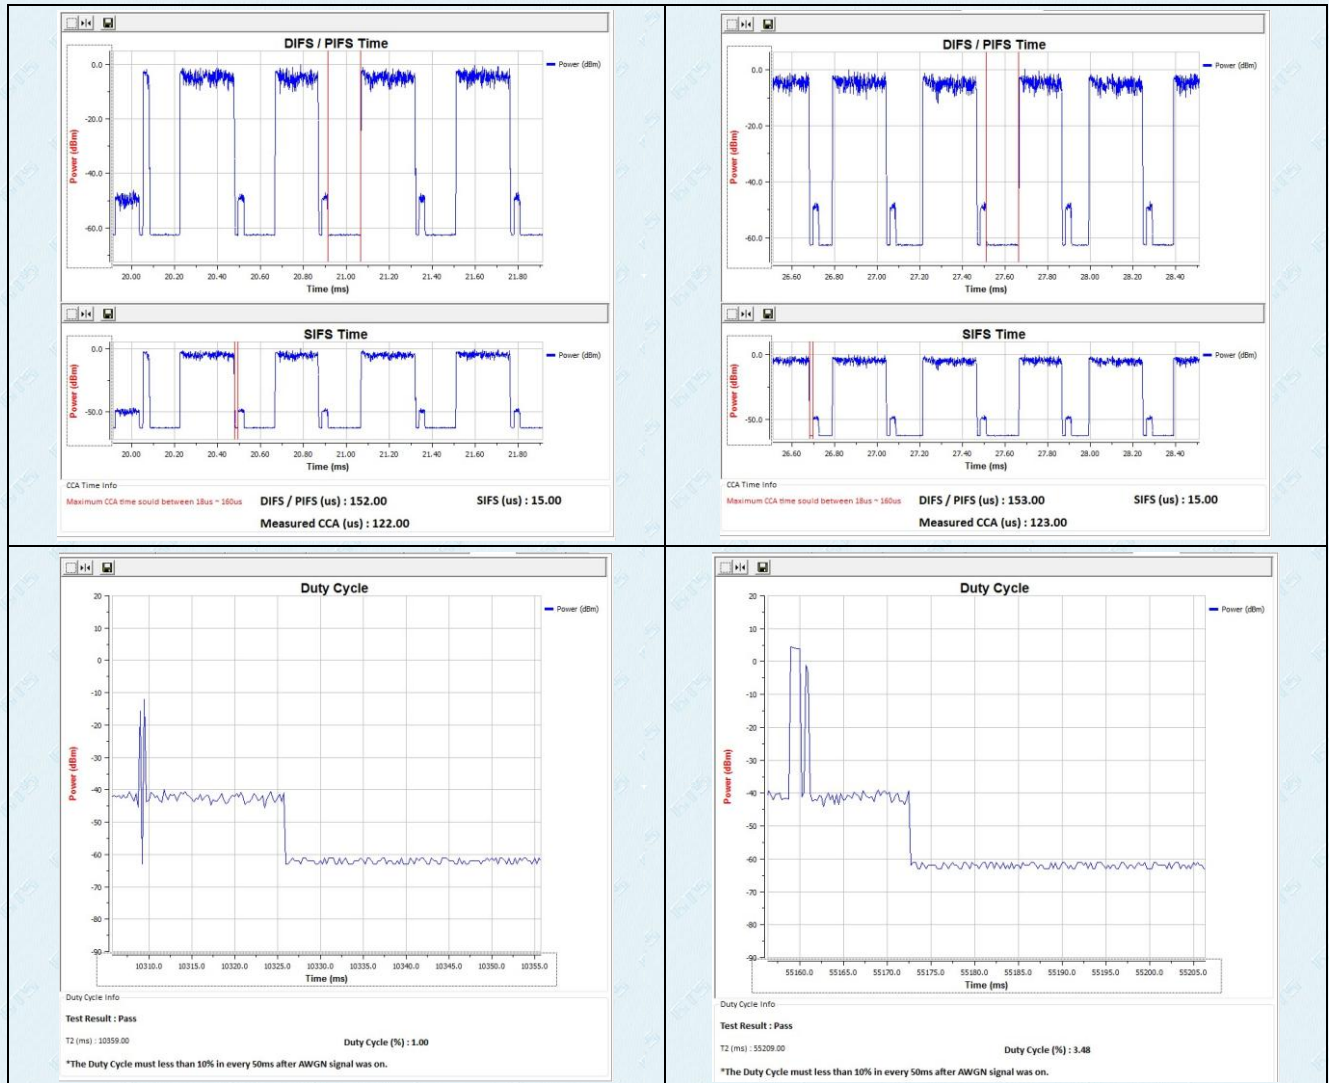
	<p>between these transmissions is not possible, the RBW in step 1 shall be further reduced. In addition, a channel filter may be used.</p> <p>Step 2:</p> <p>Save the trace data to a file for further analysis by a computing device using an appropriate software application or program.</p> <p>Step 3:</p> <p>Identify the data points related to the frequency being investigated by applying a threshold.</p> <p>Count the number of consecutive data points identified as resulting from a single transmission on the frequency being investigated and multiply this number by the time difference between two consecutive data points.</p> <p>Repeat this for all the transmissions within the measurement window.</p> <p>For measuring idle or silent periods, count the number of consecutive data points identified as resulting from a single transmitter off period on the frequency being investigated and multiply this number by the time difference between two consecutive data points. Repeat this for all the transmitter off periods within the measurement window.</p>
Measurement Record:	Uncertainty: N/A
Test Instruments:	See section 6.0
Test mode:	Normal link mode
Test Result:	Pass

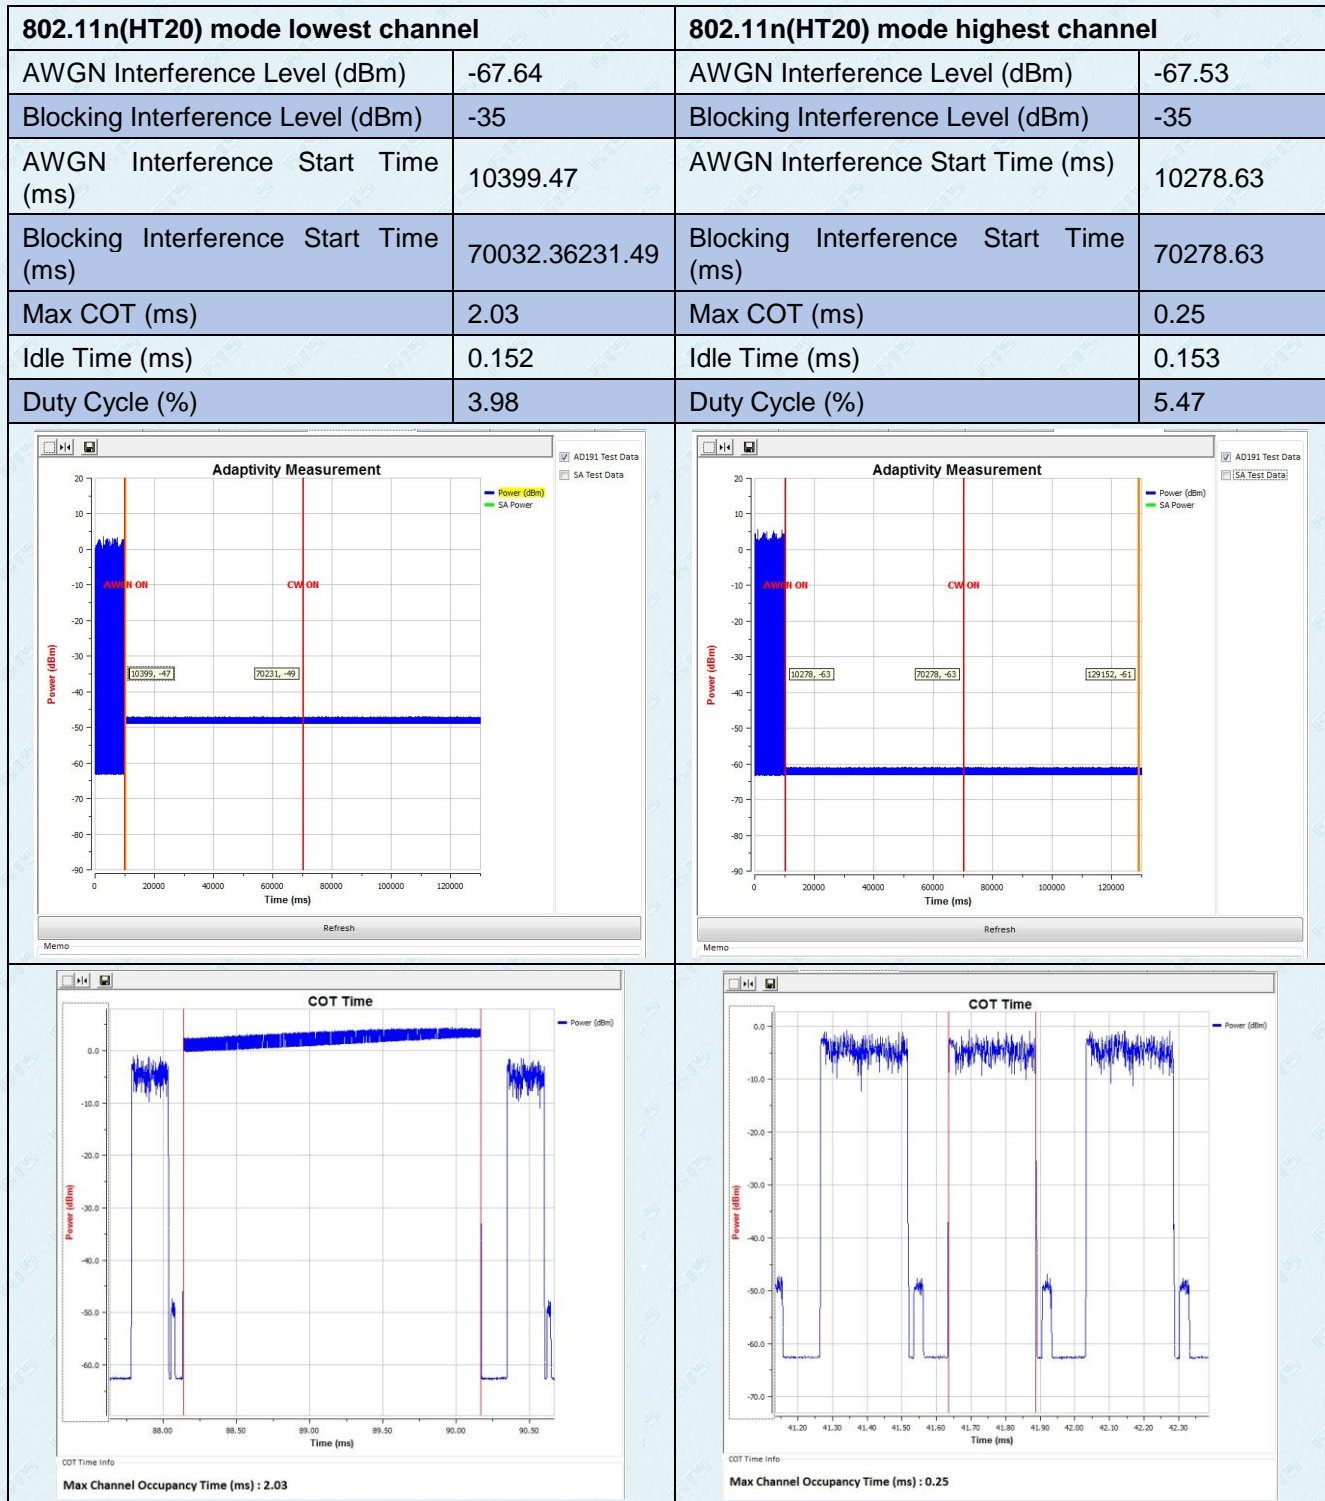
Test plots are below:

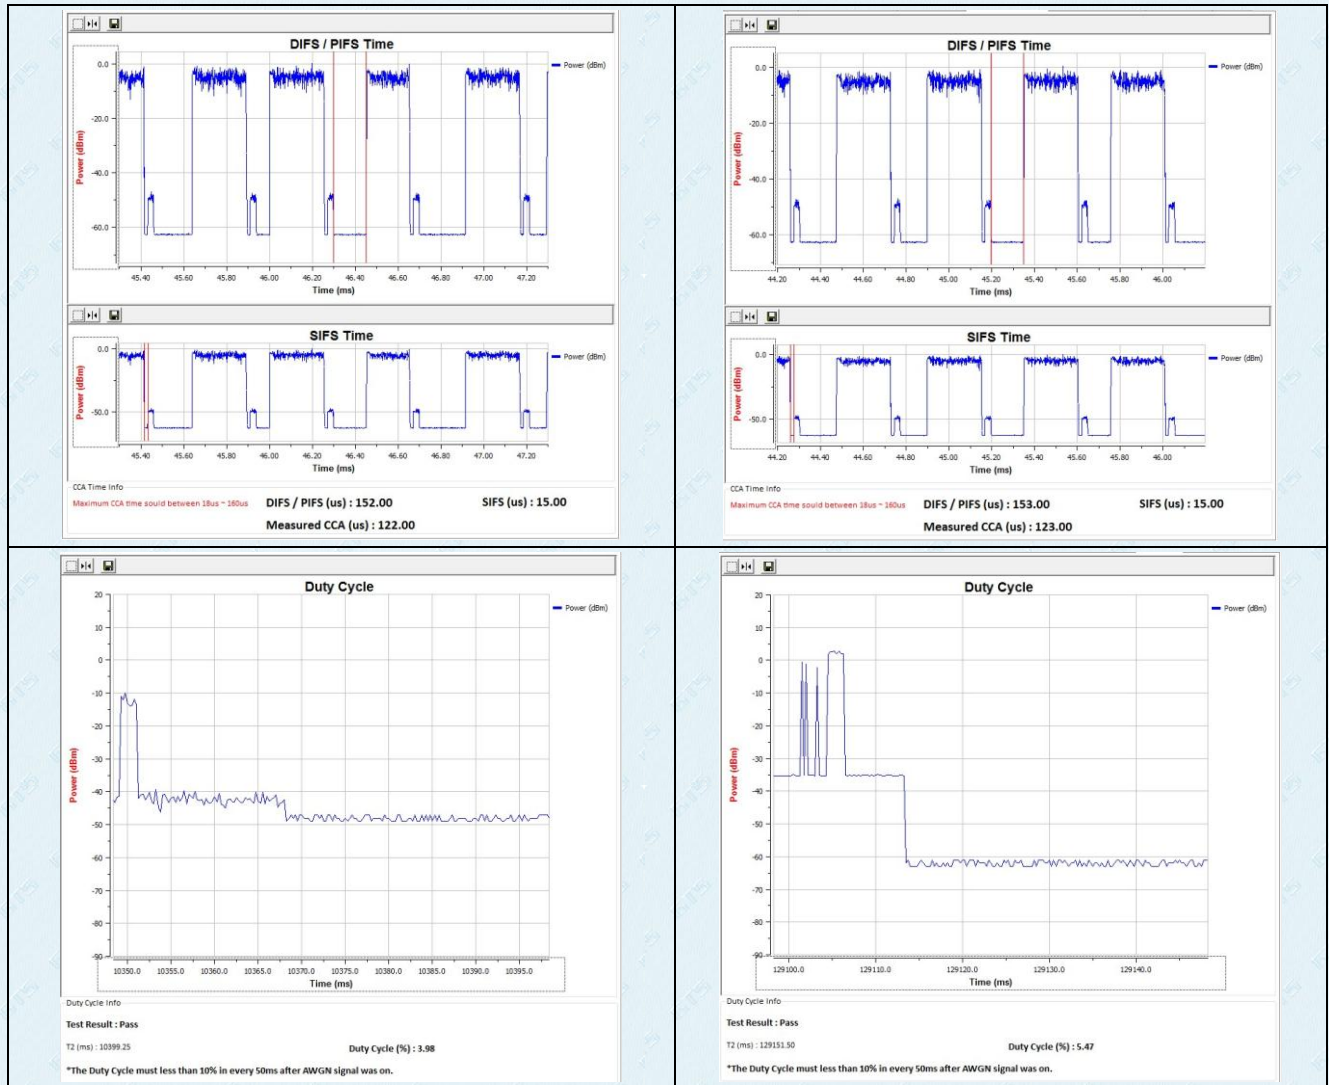


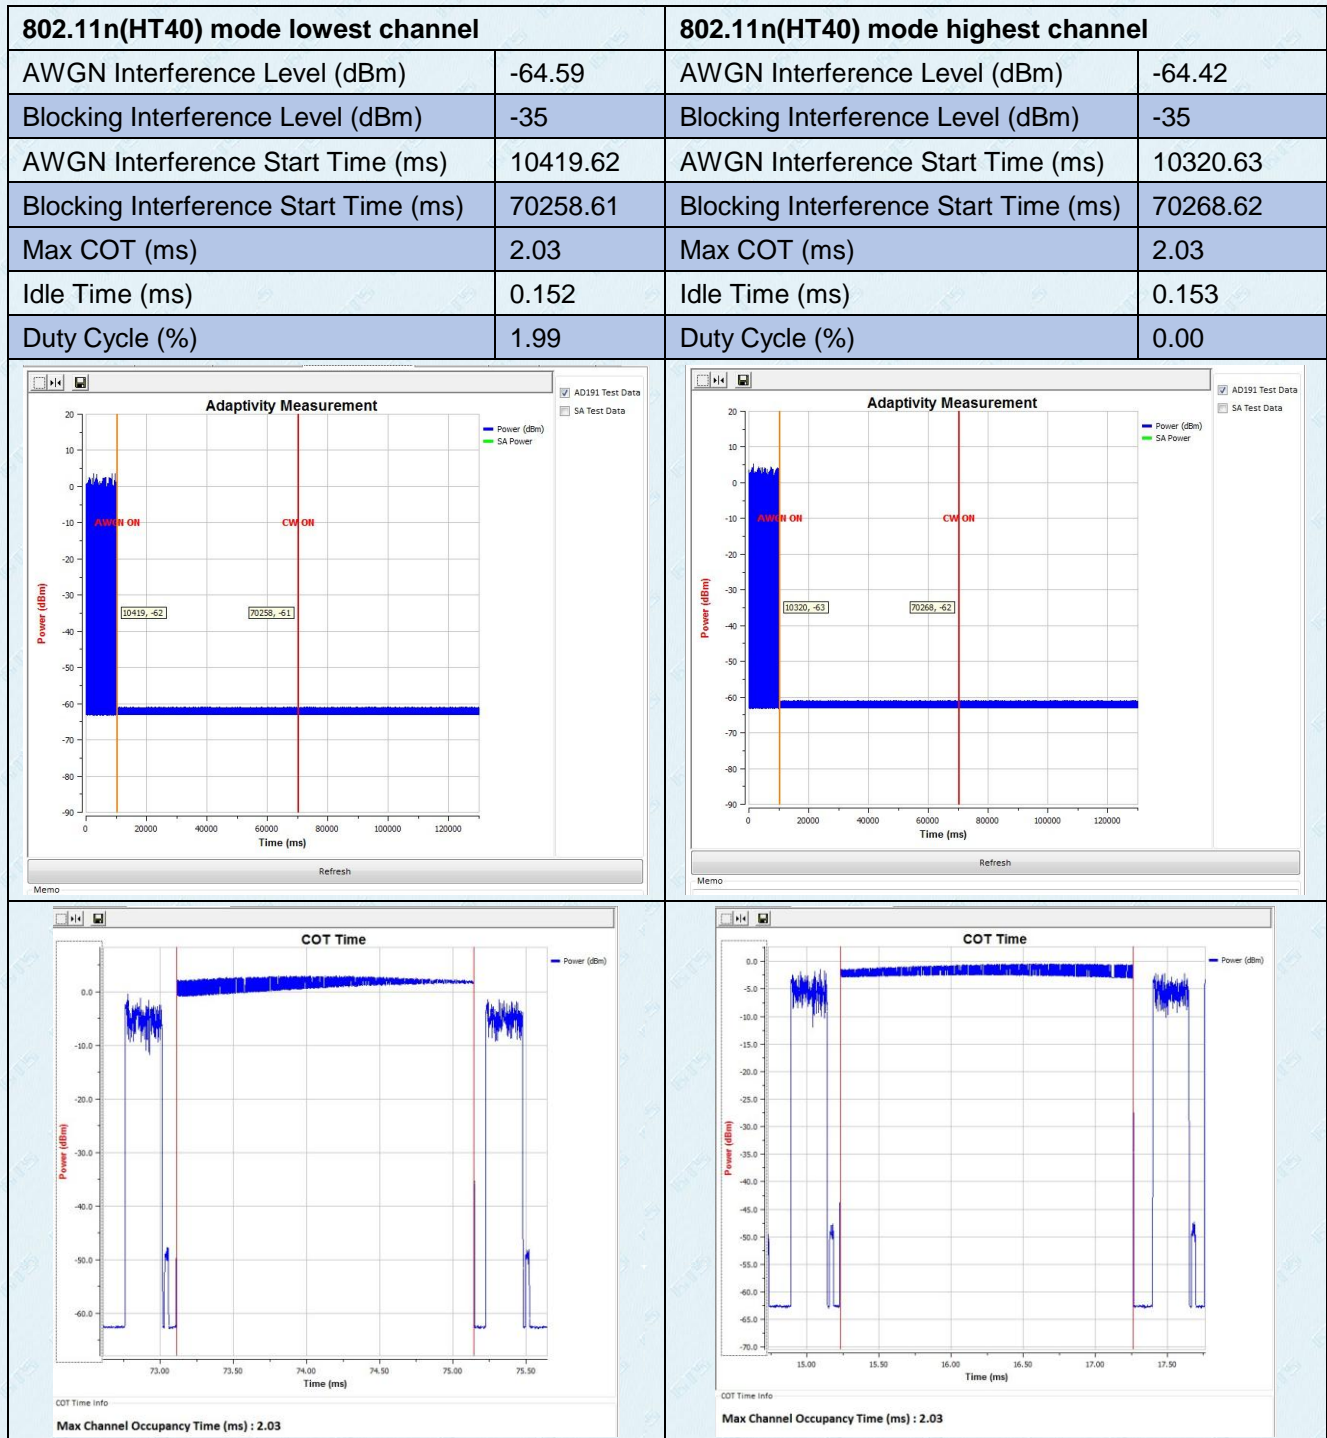


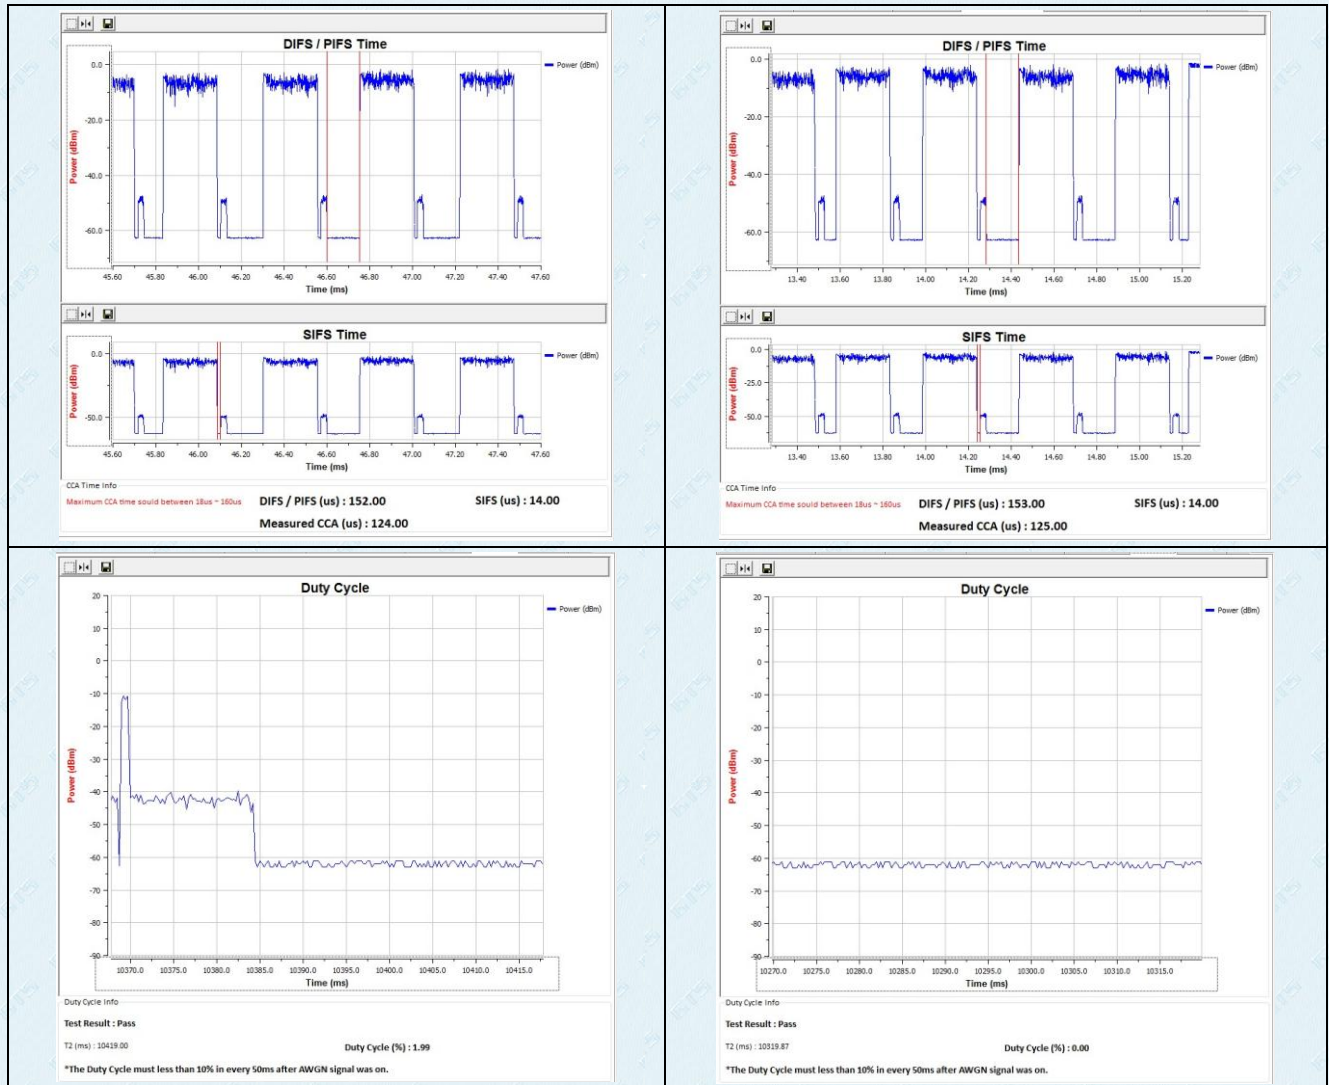








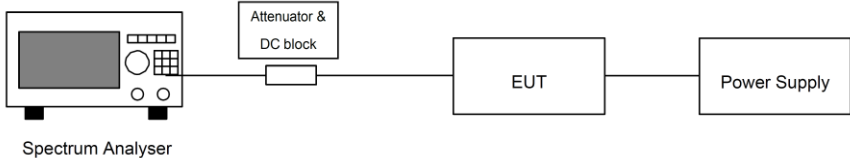




Note:

During the test, the signal observed on the channel being investigated is the Short Control Signalling Transmissions.

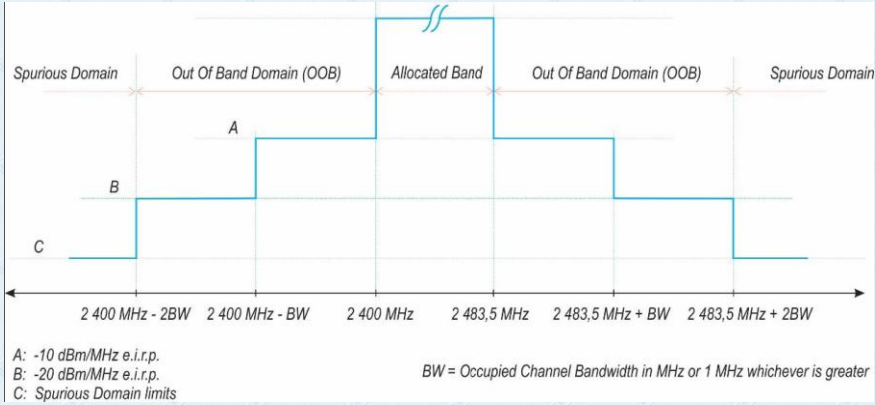
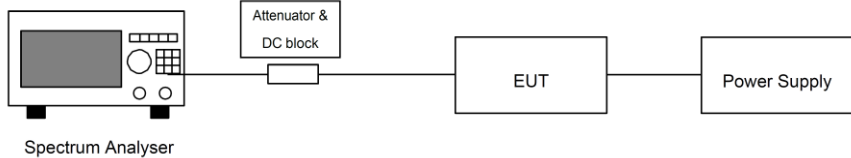
7.2.4 Occupied Channel Bandwidth

Test Requirement:	ETSI EN 300 328 clause 4.3.2.7														
Limit:	The Occupied Channel Bandwidth for each hopping frequency shall fall completely within the band 2400MHz ~ 2483.5MHz. In addition, for non-adaptive equipment using wide band modulations other than FHSS and with e.i.r.p. greater than 10 dBm, the occupied channel bandwidth shall be less than 20 MHz.														
Test setup:	 <pre> graph LR SA[Spectrum Analyser] --- A[Attenuator & DC block] A --- EUT[EUT] EUT --- PS[Power Supply] </pre>														
Test Procedure:	<p>Step 1: Connect the UUT to the spectrum analyser and use the following settings:</p> <table> <tr> <td>Centre Frequency:</td><td>The centre frequency of the channel under test</td></tr> <tr> <td>Resolution BW:</td><td>~ 1 % of the span without going below 1 %</td></tr> <tr> <td>Video BW:</td><td>3 × RBW</td></tr> <tr> <td>Frequency Span</td><td>2 × Nominal Channel Bandwidth</td></tr> <tr> <td>Detector Mode:</td><td>RMS</td></tr> <tr> <td>Trace mode:</td><td>Max Hold</td></tr> <tr> <td>Sweep time:</td><td>1 s</td></tr> </table> <p>Step 2: Wait for the trace to stabilize. Find the peak value of the trace and place the analyser marker on this peak.</p> <p>Step 3: Use the 99 % bandwidth function of the spectrum analyser to measure the Occupied Channel Bandwidth of the UUT. This value shall be recorded. Make sure that the power envelope is sufficiently above the noise floor of the analyser to avoid the noise signals left and right from the power envelope being taken into account by this measurement.</p>	Centre Frequency:	The centre frequency of the channel under test	Resolution BW:	~ 1 % of the span without going below 1 %	Video BW:	3 × RBW	Frequency Span	2 × Nominal Channel Bandwidth	Detector Mode:	RMS	Trace mode:	Max Hold	Sweep time:	1 s
Centre Frequency:	The centre frequency of the channel under test														
Resolution BW:	~ 1 % of the span without going below 1 %														
Video BW:	3 × RBW														
Frequency Span	2 × Nominal Channel Bandwidth														
Detector Mode:	RMS														
Trace mode:	Max Hold														
Sweep time:	1 s														
Test Instruments:	See section 6.0														
Test mode:	Transmitting mode														

Measurement Data:

802.11b					
Test Channel	99% Bandwidth (MHz)	Declared Bandwidth (MHz)	F _L /F _H (MHz)	Limit	Result
Lowest	12.963	20	2405.49	2400MHz ~ 2483.5MHz	Pass
Highest	12.855	20	2478.41		Pass
802.11g					
Test Channel	99% Bandwidth (MHz)	Declared Bandwidth (MHz)	F _L /F _H (MHz)	Limit	Result
Lowest	16.500	20	2403.74	2400MHz ~ 2483.5MHz	Pass
Highest	16.514	20	2480.25		Pass
802.11n(H20)					
Test Channel	99% Bandwidth (MHz)	Declared Bandwidth (MHz)	F _L /F _H (MHz)	Limit	Result
Lowest	17.668	20	2403.15	2400MHz ~ 2483.5MHz	Pass
Highest	17.684	20	2480.83		Pass
802.11n(H40)					
Test Channel	99% Bandwidth (MHz)	Declared Bandwidth (MHz)	F _L /F _H (MHz)	Limit	Result
Lowest	36.010	40	2403.95	2400MHz ~ 2483.5MHz	Pass
Highest	36.048	40	2479.98		Pass

7.2.5 Transmitter unwanted emissions in the OOB domain

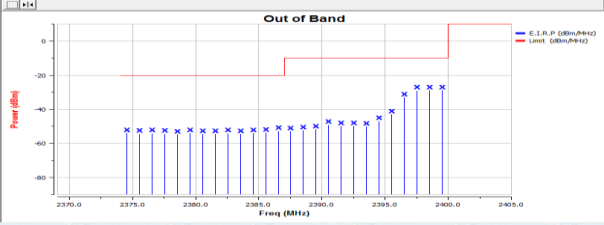
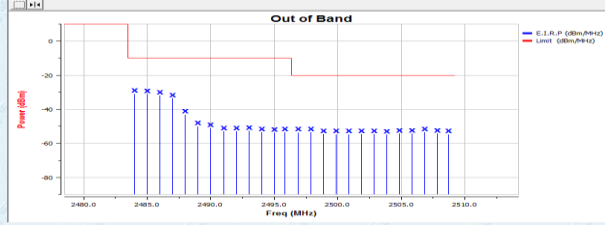
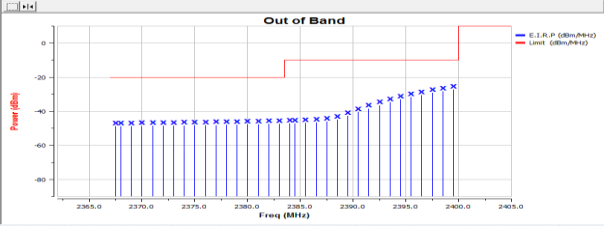
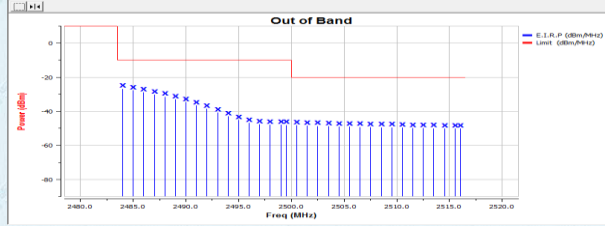
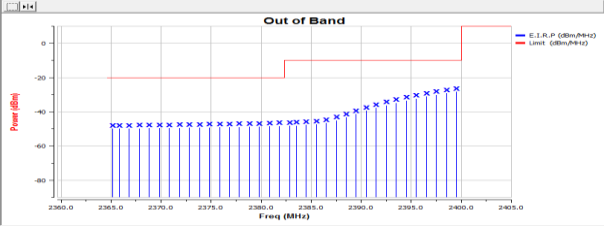
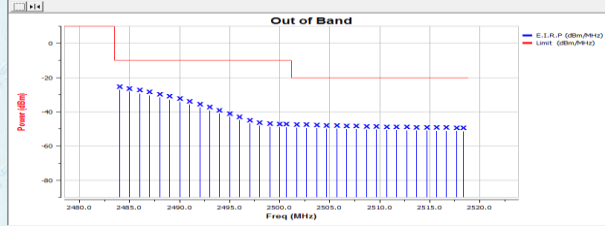
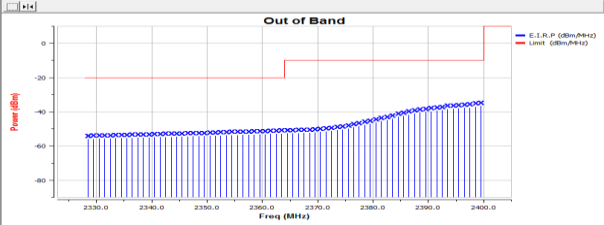
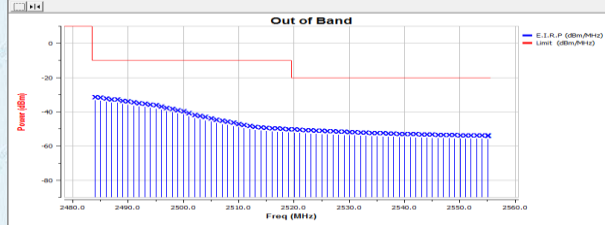
Test Requirement:	ETSI EN 300 328 clause 4.3.2.8
Test Method:	ETSI EN 300 328 clause 5.4.8.2
Limit:	<p>The transmitter unwanted emissions in the out-of-band domain but outside the allocated band, shall not exceed the values provided by the mask in figure 1</p> <p>Within the band specified in table 1, the Out-of-band emissions are fulfilled by compliance with the Occupied Channel Bandwidth requirement in clause 4.3.1.8.</p>  <p>A: -10 dBm/MHz e.i.r.p. B: -20 dBm/MHz e.i.r.p. C: Spurious Domain limits</p> <p>BW = Occupied Channel Bandwidth in MHz or 1 MHz whichever is greater</p>
Test setup:	 <p>Spectrum Analyser</p> <p>Attenuator & DC block</p> <p>EUT</p> <p>Power Supply</p>
Test procedure:	<p>The applicable mask is defined by the measurement results from the tests performed under clause 5.4.7 (Occupied Channel Bandwidth).</p> <p>The Out-of-band emissions within the different horizontal segments of the mask provided in figures 1 and 3 shall be measured using the step 1 to step 6 below. This method assumes the spectrum analyser is equipped with the Time Domain Power option.</p> <p>Step 1:</p> <p>Connect the UUT to the spectrum analyser and use the following settings:</p> <ul style="list-style-type: none"> Centre Frequency: 2 484 MHz Span: 0Hz Resolution BW: 1 MHz Filter mode: Channel filter Video BW: 3 MHz Detector Mode: RMS Trace Mode: Max Hold Sweep Mode: Continuous Sweep Points: Sweep Time [s] / (1 μs) or 5 000 whichever is greater Trigger Mode: Video trigger <p>NOTE 1: In case video triggering is not possible, an external trigger source may be used.</p>

	<p>Sweep Time: >120 % of the duration of the longest burst detected during the measurement of the RF Output Power</p> <p>Step 2: (segment 2 483,5 MHz to 2 483,5 MHz + BW)</p> <p>Adjust the trigger level to select the transmissions with the highest power level.</p> <p>For frequency hopping equipment operating in a normal hopping mode, the different hops will result in signal bursts with different power levels. In this case the burst with the highest power level shall be selected.</p> <p>Set a window (start and stop lines) to match with the start and end of the burst and in which the RMS power shall be measured using the Time Domain Power function.</p> <p>Select RMS power to be measured within the selected window and note the result which is the RMS power within this 1 MHz segment (2 483,5 MHz to 2 484,5 MHz). Compare this value with the applicable limit provided by the mask.</p> <p>Increase the centre frequency in steps of 1 MHz and repeat this measurement for every 1 MHz segment within the range 2 483,5 MHz to 2 483,5 MHz + BW. The centre frequency of the last 1 MHz segment shall be set to 2 483,5 MHz + BW - 0,5 MHz (which means this may partly overlap with the previous 1 MHz segment).</p> <p>Step 3: (segment 2 483,5 MHz + BW to 2 483,5 MHz + 2BW)</p> <p>Change the centre frequency of the analyser to 2 484 MHz + BW and perform the measurement for the first 1 MHz segment within range 2 483,5 MHz + BW to 2 483,5 MHz + 2BW. Increase the centre frequency in 1 MHz steps and repeat the measurements to cover this whole range. The centre frequency of the last 1 MHz segment shall be set to 2 483,5 MHz + 2 BW - 0,5 MHz. (which means this may partly overlap with the previous 1 MHz segment).</p> <p>Step 4: (segment 2 400 MHz - BW to 2 400 MHz)</p> <p>Change the centre frequency of the analyser to 2 399,5 MHz and perform the measurement for the first 1 MHz segment within range 2 400 MHz - BW to 2 400 MHz Reduce the centre frequency in 1 MHz steps and repeat the measurements to cover this whole range. The centre frequency of the last 1 MHz segment shall be set to 2 400 MHz - BW + 0,5 MHz (which means this may partly overlap with the previous 1 MHz segment).</p> <p>Step 5: (segment 2 400 MHz - 2BW to 2 400 MHz - BW)</p> <p>Change the centre frequency of the analyser to 2 399,5 MHz - BW and perform the measurement for the first 1 MHz segment within range 2 400 MHz - 2BW to 2 400 MHz - BW. Reduce the centre frequency in 1 MHz steps and repeat the measurements to cover this whole range. The centre frequency of the last 1 MHz segment shall be set to 2 400 MHz - 2BW + 0,5 MHz. (which means this may partly overlap with the previous 1 MHz segment).</p> <p>Step 6:</p> <p>In case of conducted measurements on equipment with a single transmit chain, the declared antenna assembly gain "G" in dBi shall be added to the results for each of the 1 MHz segments and compared with the limits provided by the mask given in figures 1 or figure 3. If more than one antenna assembly is intended for this power setting, the antenna with the highest gain shall be considered.</p> <p>In case of conducted measurements on smart antenna systems</p>
--	---

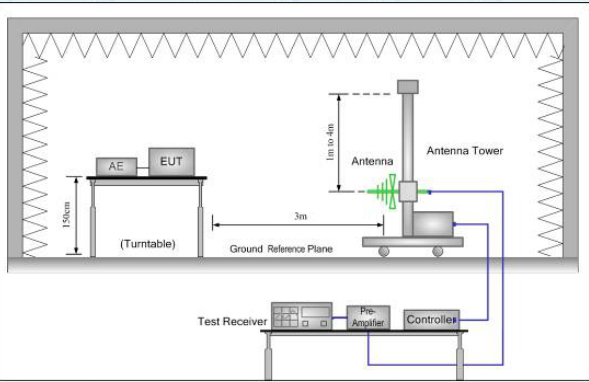
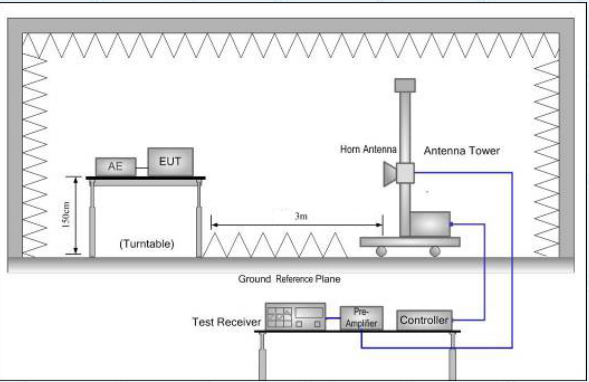
	<p>(equipment with multiple transmit chains), the measurements need to be repeated for each of the active transmit chains. The declared antenna assembly gain "G" in dBi for a single antenna shall be added to these results. If more than one antenna assembly is intended for this power setting, the antenna with the highest gain shall be considered. Comparison with the applicable limits shall be done using any of the options given below:</p> <p>Option 1: the results for each of the transmit chains for the corresponding 1 MHz segments shall be added. The additional beamforming gain "Y" in dB shall be added as well and the resulting values compared with the limits provided by the mask given in figure 1 or figure 3.</p> <p>Option 2: the limits provided by the mask given in figure 1 or figure 3 shall be reduced by $10 \times \log_{10}(A_{ch})$ and the additional beamforming gain "Y" in dB. The results for each of the transmit chains shall be individually compared with these reduced limits.</p> <p>NOTE: A_{ch} refers to the number of active transmit chains.</p> <p>It shall be recorded whether the equipment complies with the mask provided in figure 1 or figure 3.</p>
Measurement Record:	Uncertainty: $\pm 1.5\text{dB}$
Test Instruments:	See section 6.0
Test mode:	Transmitting mode
Test results:	Pass

Measurement Data:

Test plots at normal condition are followed:

Test Condition:				Normal condition			
Mode:	802.11b	Channel:	Lowest	Mode:	802.11b	Channel:	Highest
							
Mode:	802.11g	Channel:	Lowest	Mode:	802.11g	Channel:	Highest
							
Mode:	802.11n(HT20)	Channel:	Lowest	Mode:	802.11n(HT20)	Channel:	Highest
							
Mode:	802.11n(HT40)	Channel:	Lowest	Mode:	802.11n(HT40)	Channel:	Highest
							

7.2.6 Transmitter unwanted emissions in the spurious domain

Test Requirement:	ETSI EN 300 328 clause 4.3.2.9		
Test Method:	ETSI EN 300 328 clause 5.4.9.2		
Limit:	Frequency Range	Maximum power e.r.p. (≤ 1 GHz) e.i.r.p. (> 1 GHz)	Bandwidth
	30 MHz to 47 MHz	-36 dBm	100 kHz
	47 MHz to 74 MHz	-54 dBm	100 kHz
	74 MHz to 87.5 MHz	-36 dBm	100 kHz
	87.5 MHz to 118 MHz	-54 dBm	100 kHz
	118 MHz to 174 MHz	-36 dBm	100 kHz
	174 MHz to 230 MHz	-54 dBm	100 kHz
	230 MHz to 470 MHz	-36 dBm	100 kHz
	470 MHz to 694 MHz	-54 dBm	100 kHz
	694 MHz to 1 GHz	-36 dBm	100 kHz
	1 GHz to 12.75 GHz	-30 dBm	1 MHz
Test Frequency range:	30MHz to 12.75GHz		
Test setup:	<p>Below 1GHz</p>  <p>Above 1GHz</p> 		
Measurement Record:	Uncertainty: 4.64dB		
Test Instruments:	See section 6.0		
Test mode:	Transmitting mode		

Measurement Data

802.11b mode				
The lowest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	polarization	Level(dBm)		
97.97	Vertical	-70.58	-54.00	Pass
464.14	V	-67.02	-36.00	
4824.00	V	-42.83	-30.00	
7236.00	V	-45.55	-30.00	
9648.00	V	-42.20	-30.00	
12060.00	V	-43.02	-30.00	
180.50	Horizontal	-69.46	-54.00	
652.49	H	-64.91	-54.00	
4824.00	H	-45.03	-30.00	
7236.00	H	-45.74	-30.00	
9648.00	H	-42.38	-30.00	
12060.00	H	-44.35	-30.00	
The highest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	polarization	Level(dBm)		
145.73	Vertical	-72.11	-36.00	Pass
617.44	V	-63.34	-54.00	
4944.00	V	-43.25	-30.00	
7416.00	V	-45.06	-30.00	
9888.00	V	-43.84	-30.00	
12360.00	V	-43.23	-30.00	
257.65	Horizontal	-69.44	-36.00	
821.77	H	-62.39	-36.00	
4944.00	H	-44.48	-30.00	
7416.00	H	-45.52	-30.00	
9888.00	H	-43.46	-30.00	
12360.00	H	-43.81	-30.00	

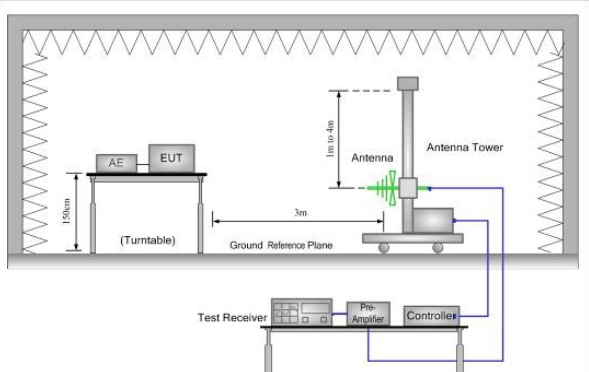
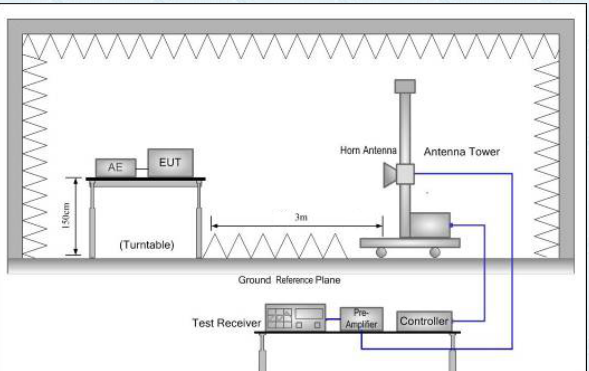
802.11g mode				
The lowest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	polarization	Level(dBm)		
103.67	Vertical	-71.51	-54.00	Pass
381.79	V	-68.18	-36.00	
4824.00	V	-52.22	-30.00	
7236.00	V	-45.87	-30.00	
9648.00	V	-42.60	-30.00	
12060.00	V	-44.60	-30.00	
130.43	Horizontal	-69.63	-36.00	
710.44	H	-68.91	-36.00	
4824.00	H	-51.26	-30.00	
7236.00	H	-45.20	-30.00	
9648.00	H	-42.70	-30.00	
12060.00	H	-45.43	-30.00	
The highest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	polarization	Level(dBm)		
159.18	Vertical	-70.69	-36.00	Pass
972.23	V	-63.10	-36.00	
4944.00	V	-52.03	-30.00	
7416.00	V	-45.15	-30.00	
9888.00	V	-43.19	-30.00	
12360.00	V	-43.21	-30.00	
127.99	Horizontal	-70.02	-36.00	
780.67	H	-71.73	-36.00	
4944.00	H	-51.19	-30.00	
7416.00	H	-45.69	-30.00	
9888.00	H	-42.22	-30.00	
12360.00	H	-42.14	-30.00	

802.11n(HT20) mode				
The lowest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	polarization	Level(dBm)		
199.68	Vertical	-69.92	-54.00	Pass
779.58	V	-64.39	-36.00	
4824.00	V	-52.63	-30.00	
7236.00	V	-45.36	-30.00	
9648.00	V	-43.78	-30.00	
12060.00	V	-43.52	-30.00	
208.13	Horizontal	-70.17	-54.00	
724.33	H	-62.39	-36.00	
4824.00	H	-52.64	-30.00	
7236.00	H	-46.30	-30.00	
9648.00	H	-43.60	-30.00	
12060.00	H	-45.03	-30.00	
The highest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	polarization	Level(dBm)		
289.18	Vertical	-69.29	-36.00	Pass
913.99	V	-66.10	-36.00	
4944.00	V	-52.22	-30.00	
7416.00	V	-44.38	-30.00	
9888.00	V	-43.30	-30.00	
12360.00	V	-44.10	-30.00	
147.85	Horizontal	-72.19	-36.00	
888.33	H	-71.60	-36.00	
4944.00	H	-50.83	-30.00	
7416.00	H	-46.79	-30.00	
9888.00	H	-43.24	-30.00	
12360.00	H	-45.62	-30.00	

802.11n(HT40) mode				
The lowest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	polarization	Level(dBm)		
120.26	Vertical	-69.79	-36.00	Pass
485.96	V	-60.55	-54.00	
4824.00	V	-52.41	-30.00	
7236.00	V	-45.64	-30.00	
9648.00	V	-43.18	-30.00	
12110.00	V	-45.10	-30.00	
157.87	Horizontal	-68.69	-36.00	
708.87	H	-63.62	-36.00	
4824.00	H	-52.12	-30.00	
7236.00	H	-45.79	-30.00	
9648.00	H	-42.35	-30.00	
12110.00	H	-45.03	-30.00	
The highest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	polarization	Level(dBm)		
122.31	Vertical	-69.49	-36.00	Pass
859.48	V	-62.43	-36.00	
4944.00	V	-52.21	-30.00	
7416.00	V	-46.02	-30.00	
9888.00	V	-42.49	-30.00	
12310.00	V	-44.99	-30.00	
198.47	Horizontal	-67.17	-54.00	
614.81	H	-64.25	-54.00	
4944.00	H	-50.35	-30.00	
7416.00	H	-46.40	-30.00	
9888.00	H	-44.19	-30.00	
12310.00	H	-46.08	-30.00	

7.3 Receiver Requirement

7.3.1 Spurious Emissions

Test Requirement:	ETSI EN 300 328 clause 4.3.2.10		
Test Method:	ETSI EN 300 328 clause 5.4.10.2		
Limit:	Frequency	Maximum power e.r.p. (≤ 1 GHz) e.i.r.p. (> 1 GHz)	Measurement bandwidth
	30MHz to 1000 MHz	-57 dBm	100 kHz
	1GHz to 12.75GHz	-47 dBm	1 MHz
Test Frequency range:	30MHz to 12.75GHz		
Test setup:	<p>Below 1GHz</p>  <p>Above 1GHz</p> 		
Measurement Record:	Uncertainty: 4.64dB		
Test mode:	Receiving mode		
Test Instruments:	See section 6.0		

Measurement Data:

802.11b mode				
The lowest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	polarization	Level(dBm)		
112.33	Vertical	-73.68	2nW/ -57dBm below 1GHz, 20nW/ -47dBm above 1GHz.	Pass
782.10	V	-67.31		
4824.00	V	-66.57		
7236.00	V	-60.33		
9648.00	V	-57.02		
12060.00	V	-55.56		
225.62	Horizontal	-73.52		
502.40	H	-66.45		
4824.00	H	-63.43		
7236.00	H	-60.62		
9648.00	H	-57.21		
12060.00	H	-56.06		
The highest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	polarization	Level(dBm)		
94.29	Vertical	-74.34	2nW/ -57dBm below 1GHz, 20nW/ -47dBm above 1GHz.	Pass
608.91	V	-67.32		
4944.00	V	-64.95		
7416.00	V	-60.07		
9888.00	V	-56.87		
12360.00	V	-54.66		
176.03	Horizontal	-72.01		
526.28	H	-66.06		
4944.00	H	-64.64		
7416.00	H	-57.81		
9888.00	H	-53.96		
12360.00	H	-53.83		

802.11g mode				
The lowest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	polarization	Level(dBm)		
101.92	Vertical	-72.77	2nW/ -57dBm below 1GHz, 20nW/ -47dBm above 1GHz.	Pass
637.85	V	-68.37		
4944.00	V	-64.84		
7416.00	V	-60.49		
9888.00	V	-56.48		
12360.00	V	-54.90		
118.80	Horizontal	-72.40		
573.60	H	-68.39		
4944.00	H	-63.61		
7416.00	H	-57.89		
9888.00	H	-55.45		
12360.00	H	-54.63		
The highest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	polarization	Level(dBm)		
139.32	Vertical	-74.22	2nW/ -57dBm below 1GHz, 20nW/ -47dBm above 1GHz.	Pass
647.93	V	-74.67		
4944.00	V	-64.29		
7416.00	V	-59.27		
9888.00	V	-55.87		
12360.00	V	-54.51		
151.00	Horizontal	-73.29		
734.71	H	-70.07		
4944.00	H	-63.98		
7416.00	H	-59.19		
9888.00	H	-55.88		
12360.00	H	-53.86		

802.11n(HT20) mode				
The lowest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	polarization	Level(dBm)		
122.41	Vertical	-73.00	2nW/ -57dBm below 1GHz, 20nW/ -47dBm above 1GHz.	Pass
595.14	V	-70.83		
4824.00	V	-57.98		
7236.00	V	-62.85		
9648.00	V	-60.51		
12060.00	V	-57.33		
129.01	Horizontal	-73.20		
731.83	H	-65.54		
4824.00	H	-57.45		
7236.00	H	-63.34		
9648.00	H	-60.19		
12060.00	H	-56.64		
The highest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	polarization	Level(dBm)		
236.43	Vertical	-71.62	2nW/ -57dBm below 1GHz, 20nW/ -47dBm above 1GHz.	Pass
911.61	V	-68.70		
4944.00	V	-65.44		
7416.00	V	-62.09		
9888.00	V	-58.74		
12360.00	V	-56.17		
324.01	Horizontal	-68.18		
925.13	H	-64.95		
4944.00	H	-63.61		
7416.00	H	-59.16		
9888.00	H	-56.39		
12360.00	H	-55.10		

802.11n(HT40) mode				
The lowest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	polarization	Level(dBm)		
119.95	Vertical	-70.39	2nW/ -57dBm below 1GHz, 20nW/ -47dBm above 1GHz.	Pass
777.86	V	-73.84		
4844.00	V	-65.27		
7266.00	V	-59.16		
9688.00	V	-55.70		
12110.00	V	-54.95		
170.27	Horizontal	-69.58		
885.33	H	-73.40		
4844.00	H	-63.61		
7266.00	H	-59.93		
9688.00	H	-56.65		
12110.00	H	-54.78		
The highest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	polarization	Level(dBm)		
311.55	Vertical	-71.39	2nW/ -57dBm below 1GHz, 20nW/ -47dBm above 1GHz.	Pass
633.13	V	-73.64		
4924.00	V	-64.95		
7386.00	V	-60.03		
9848.00	V	-56.94		
12310.00	V	-54.98		
370.06	Horizontal	-69.95		
643.36	H	-73.79		
4924.00	H	-64.30		
7386.00	H	-58.91		
9848.00	H	-55.91		
12310.00	H	-54.65		

7.3.2 Receiver Blocking

Test Requirement:	ETSI EN 300 328 clause 4.3.2.11																		
Test Method:	ETSI EN 300 328 clause 5.4.11.2.																		
Limit:	<p>While maintaining the minimum performance criteria as defined in clause 4.3.1.12.3, the blocking levels at specified frequency offsets shall be equal to or greater than the limits defined for the applicable receiver category provided in table 6, table 7 or table 8.</p> <p>Table 6: Receiver Blocking parameters for Receiver Category 1 equipment</p> <table><tr><th>Wanted signal mean power from companion device (dBm) (see notes 1 and 4)</th><th>Blocking signal frequency (MHz)</th><th>Blocking signal power (dBm) (see note 4)</th><th>Type of blocking signal</th></tr><tr><td>(-133 dBm + 10 × log₁₀(OCBW)) or -68 dBm whichever is less (see note 2)</td><td>2 380 2 504</td><td rowspan="2">-34</td><td rowspan="2">CW</td></tr><tr><td>(-139 dBm + 10 × log₁₀(OCBW)) or -74 dBm whichever is less (see note 3)</td><td>2 300 2 330 2 360 2 524 2 584 2 674</td></tr></table> <p>NOTE 1: OCBW is in Hz. NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to P_{min} + 26 dB where P_{min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal. NOTE 3: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to P_{min} + 20 dB where P_{min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal. NOTE 4: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.</p> <p>Table 7: Receiver Blocking parameters receiver Category 2 equipment</p> <table><tr><th>Wanted signal mean power from companion device (dBm) (see notes 1 and 3)</th><th>Blocking signal frequency (MHz)</th><th>Blocking signal power (dBm) (see note 3)</th><th>Type of blocking signal</th></tr><tr><td>(-139 dBm + 10 × log₁₀(OCBW) + 10 dB) or (-74 dBm + 10 dB) whichever is less (see note 2)</td><td>2 380 2 504 2 300 2 584</td><td>-34</td><td>CW</td></tr></table> <p>NOTE 1: OCBW is in Hz. NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to P_{min} + 26 dB where P_{min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal. NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.</p>	Wanted signal mean power from companion device (dBm) (see notes 1 and 4)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 4)	Type of blocking signal	(-133 dBm + 10 × log ₁₀ (OCBW)) or -68 dBm whichever is less (see note 2)	2 380 2 504	-34	CW	(-139 dBm + 10 × log ₁₀ (OCBW)) or -74 dBm whichever is less (see note 3)	2 300 2 330 2 360 2 524 2 584 2 674	Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 3)	Type of blocking signal	(-139 dBm + 10 × log ₁₀ (OCBW) + 10 dB) or (-74 dBm + 10 dB) whichever is less (see note 2)	2 380 2 504 2 300 2 584	-34	CW
Wanted signal mean power from companion device (dBm) (see notes 1 and 4)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 4)	Type of blocking signal																
(-133 dBm + 10 × log ₁₀ (OCBW)) or -68 dBm whichever is less (see note 2)	2 380 2 504	-34	CW																
(-139 dBm + 10 × log ₁₀ (OCBW)) or -74 dBm whichever is less (see note 3)	2 300 2 330 2 360 2 524 2 584 2 674																		
Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 3)	Type of blocking signal																
(-139 dBm + 10 × log ₁₀ (OCBW) + 10 dB) or (-74 dBm + 10 dB) whichever is less (see note 2)	2 380 2 504 2 300 2 584	-34	CW																

	<p>Table 8: Receiver Blocking parameters receiver Category 3 equipment</p> <table><tr><th>Wanted signal mean power from companion device (dBm) (see notes 1 and 3)</th><th>Blocking signal frequency (MHz)</th><th>Blocking signal power (dBm) (see note 3)</th><th>Type of blocking signal</th></tr><tr><td>(-139 dBm + 10 × log₁₀(OCBW) + 20 dB) or (-74 dBm + 20 dB) whichever is less (see note 2)</td><td>2 380 2 504 2 300 2 584</td><td>-34</td><td>CW</td></tr></table> <p>NOTE 1: OCBW is in Hz.</p> <p>NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative the test may be performed using a wanted signal up to P_{min} + 30 dB where P_{min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.</p> <p>NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.</p>	Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 3)	Type of blocking signal	(-139 dBm + 10 × log ₁₀ (OCBW) + 20 dB) or (-74 dBm + 20 dB) whichever is less (see note 2)	2 380 2 504 2 300 2 584	-34	CW
Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 3)	Type of blocking signal						
(-139 dBm + 10 × log ₁₀ (OCBW) + 20 dB) or (-74 dBm + 20 dB) whichever is less (see note 2)	2 380 2 504 2 300 2 584	-34	CW						
Test setup:	<pre>graph LR SUCD[Signalling Unit or Companion Device] <--> ATT1[ATT.] BSS[Blocking Signal Source] --> SC[Splitter/Combiner] ATT1 --> SC SC --> DC[Direct Coupler] SC --> SA[Spectrum Analyzer] DC --> ATT2[ATT.] ATT2 --> UUT[UUT] UUT --> PMD[Performance Monitoring Device]</pre>								
Measurement Record:	Uncertainty: N/A								
Test Instruments:	See section 6.0								
Test mode:	Normal link mode								

Measurement Data:

Receiver Category	Test Channel	Wanted signal mean power from companion device (dBm)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 2)	PER (%)	Limit (%)	Result
1	Lowest	-78	2380	-34	6.9	10	Pass
			2504		4.4	10	Pass
		-76	2300		4.3	10	Pass
			2330		3.2	10	Pass
			2360		4.3	10	Pass
			2524		5.4	10	Pass
			2584		6.1	10	Pass
			2674		3.6	10	Pass
	Highest	-78	2380		1.9	10	Pass
			2504		4.1	10	Pass
		-76	2300		2.5	10	Pass
			2330		5.3	10	Pass
			2360		5.4	10	Pass
			2524		2.5	10	Pass
			2584		5.6	10	Pass
			2674		4.4	10	Pass

8 Test setup photo

Reference to the **appendix I** for details.

9 EUT Constructional Details

Reference to the **appendix II** for details.

-----End-----