



WL-G955 5G Router



Engineered for mission-critical industrial IoT applications, the WL-G955 delivers ultra-reliable 5G connectivity compliant with 3GPP Release 17 standards. It operates in both 5G SA and NSA modes with network slicing capabilities, while maintaining full backward compatibility with 4G LTE and 3G networks. G955 features dual 5G modems and dual SIM cards, with dual-5G backup, load balancing, and link bonding/aggregation. These capabilities ensure uninterrupted connectivity and optimized bandwidth utilization. Advanced carrier aggregation enables a theoretical peak throughput of 3.4 Gbps, supporting real-time data transmission for latency-sensitive industrial operations.


Powered by a dual-core 1.3GHz ARM Cortex-A53 processor and a dedicated hardware encryption engine, the router integrates 5x GbE Ethernet ports, 1xUSB, 1x RS232, 1x RS485 serial ports, and programmable DI/DO digital controls. Its 802.11AX 3000 module supports concurrent speeds up to 3Gbps, while supporting a deeply customized OpenWrt-based operating system(optional), which embraces a variety of open-source components and multi-runtime environments—empowering customers to tailor solutions for custom applications.

With broad industry applicability, the WL-G955 is ideal for factory automation, smart grids, intelligent transportation, environmental monitoring, security surveillance, public safety, advertising, and 4K live streaming.




Cutting-Edge 5G Performance

Dual-5G Sub-6GHz NSA&SA/4G LTE network for backup among multiple carrier networks
5G blazing fast Mobile Broadband Internet, delivering ground-breaking download speeds up to 5Gbps.



Versatile Connectivity

Multiple interfaces including Gigabit Ethernet,USB, RS-232,RS-485,and DI/DO. IP-based PLC communication,with support for IPv6,and plug- and-play terminals. GNSS tracking and Storage are optional.



Dual-Core Powerhouse

ARM Dual-core 1.3GHz A53 processor enables efficient multitasking and low latency. Handles high-bandwidth applications like video streaming.



Flexible and Customizable OS

WLINK OS and OpenWRT OS optional. Support deeply customized OpenWrt system with open-source support. Supports multiple programming languages environment and tailored business logic development.



Blazing Fast Wi-Fi6


Wi-Fi 6 revolutionizes wireless connectivity with blazing speed(3Gbps), massive device capacity, ultra-low lag and robust security.



Cloud-Based Platform Management

G955 can be managed via cloud management platform which provide easy setup, centralized configuration, network analysis and maintenance of large installations.

Interface Diagram

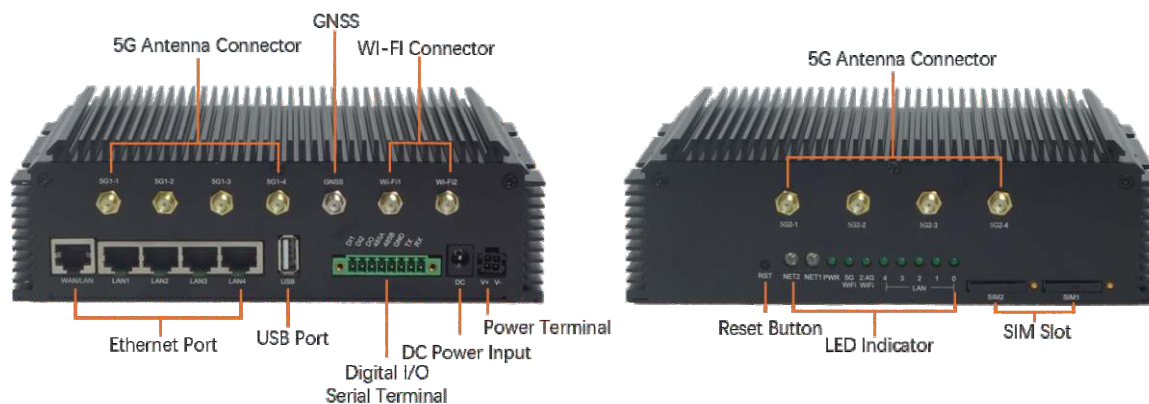

eMBB(enhanced Mobile Broadband)

Key network considerations
Per-connection peak speed,network capacity Includes streaming and high definition video,360 degree video,public transit,and other data-intensive and image-intensive use cases

URLLC(Ultra Reliable Low Latency Communications)

Key network considerations Reliability, latency such as VR and AR,remote control of critical infrastructure,vehicles,Industrial automation and utilities

Massive IoT

Key network considerations scalability to very large number of connections includes Smart City,Connected Vehicles,Smart Home,Smart Media,Smart Factories, Healthcare,Smart Metering,Smart Grid, Oil and gas

Typical Application



Specification

Physical			
Cellular Network	5G SA/NSA n1/2/3/5/7/8/12/13/14/18/20/25/26/28/29/30/38/40/41/48/66/70/71/75/76/77/78/79 LTE-A/LTE B1/2/3/4/5/7/8/12/13/14/17/18/19/20/25/26/28/29/30/32/66/71/34/38/39/40/41/42/43/48	Hardware System	Qualcomm ARM A53 dual-core 1.3GHz 512MB DDR3 RAM 16MB NOR FLASH 128MB NAND FLASH Hardware Watchdog
Interface	5 x Gigabit Ethernet (5x LAN, 4X LAN/1x WAN Configurable) 1 x RS232, 1 x RS485 1 x DC(5.5mm), 1x DC(4Pins plugs) 2 x SIM Slots 1 x RST 1 x USB 8x SMA-K (Female) 5G Antenna Interface 2x RP-SMA Wi-Fi Interface 1 x SMA-K(Female) GPS Antenna (optional)	GPS(optional)	GPS sensitivity: -160dBm GPS accuracy: 2.5m CEP Update Rate: 1Hz@5Hz Time to First Fix: Cold Status 27s, Hot status 1s Protocol: NMEA-0183 2.3V
LED Indicator	PWR NET1, NET2 5G Wi-Fi, 2.4G Wi-Fi LAN (LAN1~LAN4, WAN)	WLAN(Wi-Fi6)	IEEE 802.11b/g/n/ax 2x2 2.4GHz&5GHz MUMIMO OFDMA 3000Mbps
Consumption	Voltage: DC +12~32V (standard 12V/2A power adapter) SIM/R-UIM Card: 1.8V/3V Idle: 600mA@+12VDC Online: 750mA@+12VDC	Others	Dimension: 190×124×60mm Weight: 1080g (not including accessories) Mount: Wall Mount Operation temperature: -30~ + 75 °C Store temperature: -40~ +85 °C Related humidity: 0~95% (non-condensing) Guarantee: two years
Ethernet Protocol	IEEE 802.3, IEEE 802.3u, 802.3az, Auto MDI/MDIX	Certification	CE, CCC, RoHS
Software			
Operating System	WLINK OS Based Linux as default OpenWRT OS Optional	Firewall	SNAT/DMZ Port Forwarding IP/Mac/Key Word/Domain Name Filter Anti-DoS Access Control
Network Protocol	IPv4/v6, PPPoE, UDP, TCP, ICMP, NTP, DHCP, Modbus, HTTP/HTTPS, UPNP, SNMPv3, TR069, DDNS,Telnet/SSH, MQTT	Network Monitoring	Ethernet Ports Status ICMP Check Traceroute Data Capture Bandwidth Graph Data Traffic Graph System Debugging Log
VPN	CRE Tunnel Zerotier VPN Tailscale Wireguard VPN Client and Sever supported OpenVPN: TLS1.2, Encryption as DES, RC2, BF,3DES, CAST5, AES,SEED 45 encryption methods PPTP/L2TP: Client mode, L2TPv3 supported IPSec: GRE Over IPsec, L2TP over IPsec, Two tunnels Failover, IKEv1, IKEv2, DES, 3DES, AES128, AES192, AES256 multiple encryption methods supported. DMVPN: mGRE, NHRP, IPsec	Network Features	Dual-5G Load balance Dual-SIM Failover WAN/5G Failover Serial Port Client/Server Applications AT command over IP VRRP VLAN IP Passthrough Bandwidth Management Static Routing/Policy Routing RIPV2/OSPF/BGP Dynamic Routing
Router Management	Local/Remote GUI Telnet/SSH SNMP v3/TR069 WLINK M2M Management Platform	WLAN	IEEE 802.11b/g/n/ac/ax, AP, Wireless Client and Ethernet Bridge modes WiFi usersup to 128 simultaneous connections Wi-Fi Hotspot Wireless Black/White List Multi-SSID WPA Personal, WPA2 Personal, WPA/WPA2 Personal AES, TKIP, Auto Cipher modes Wi-Fi Captive Hotspot

Shenzhen Wlink Technology Co., LTD

Add: 2A, Building F5, TCL International E-city, Zhongshanyuan Rd. Nanshan, Shenzhen, China

Tel: 86-755-86089513

Web: www.wlink-tech.com