Shenzhen Wlink Technology Co., LTD
深圳市德传物联技术有限公司

WL-M300 Series modem Quickstart

1. Driver Installation

In Driver3.17 file, double click "DriverSetup" file, it will automatically install modem driver.

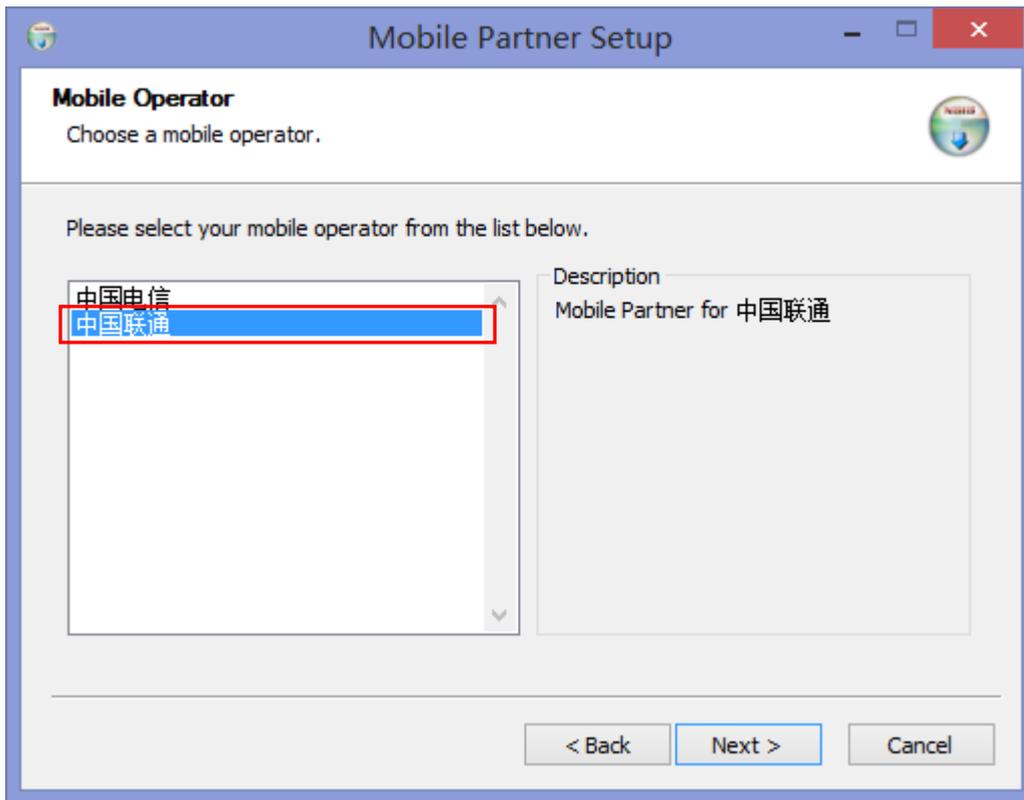|	
Driver.00	2010/4/1 12:13
devsetup32.exe	2010/3/31 15:07
devsetup64.exe	2010/3/31 15:06
DriverSetup.exe	2010/3/5 11:33
DriverUninstall.exe	2010/3/5 11:32
Install.log	2015/2/11 12:56
LocateDevice.dll	2007/8/8 11:55
release notes.txt	2010/3/31 9:46

2. Internet Connection

Normally, there are two methods to create internet connection. One is Mobile Partner Tool, and the other method is to create connection in Windows OS.

2.1 Mobile Partner Tool
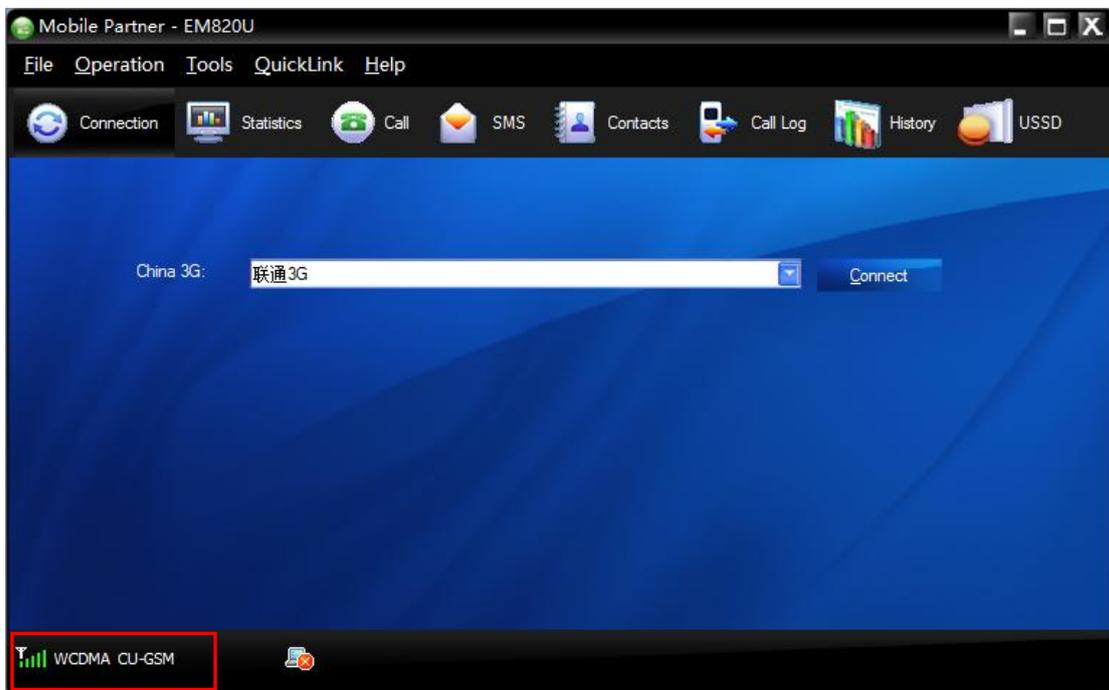
1) Install Mobile Partner

In MP_V16.002.15.04 file, please double click MP_V16.002.15.04.exe. Please select English language and mobile operator as below.
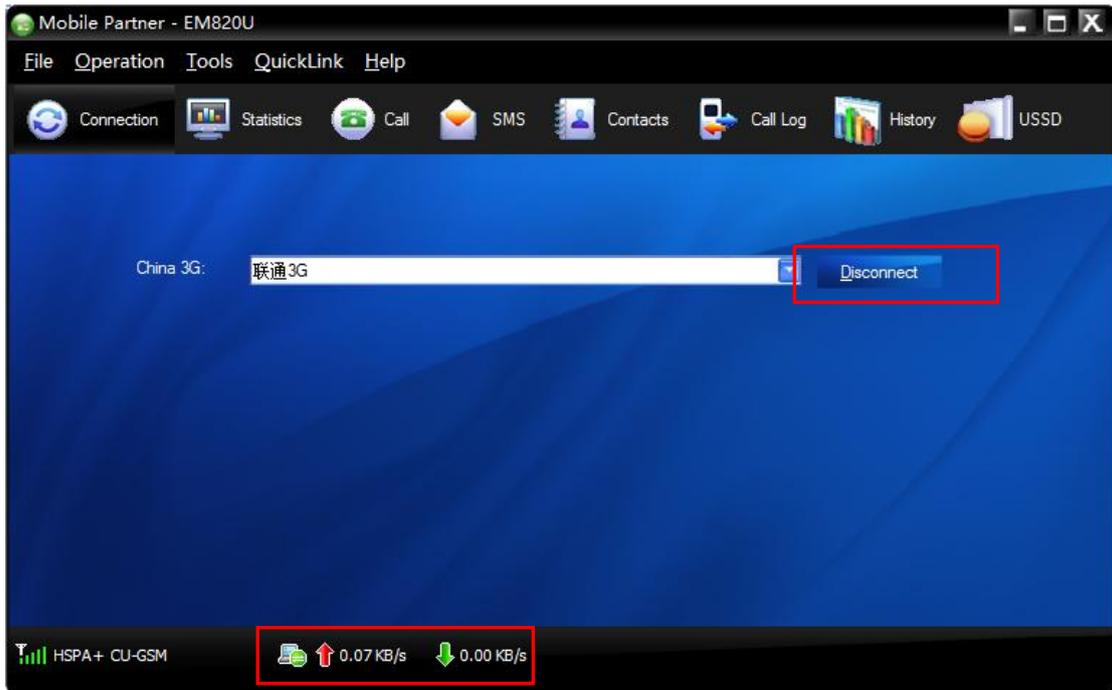
MP_V16.002.15.04.exe

2) Connect Internet

After plug SIM card and connect USB cable, the modem will automatically register on 3G network. When display network signal and network type as below, please click Connect button.

Once Connection is established, the Connect button will be changed to Disconnect button and indicate download and upload speed in the button of Mobile Partner Tool.
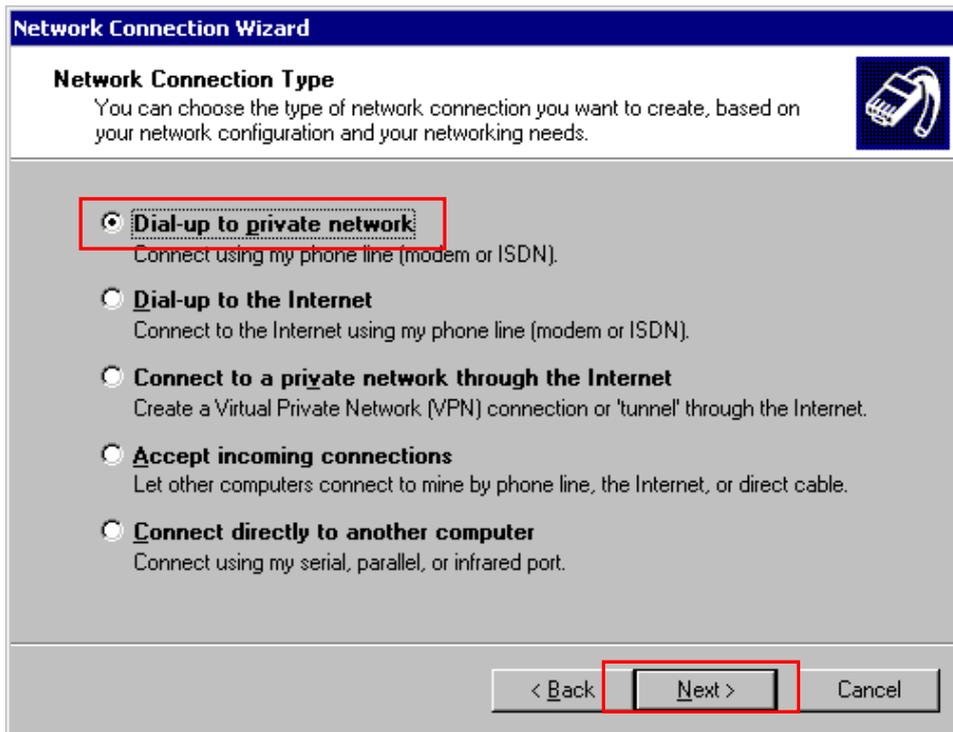
2.2 Create Connection in Windows

The following example is based on Windows XP.
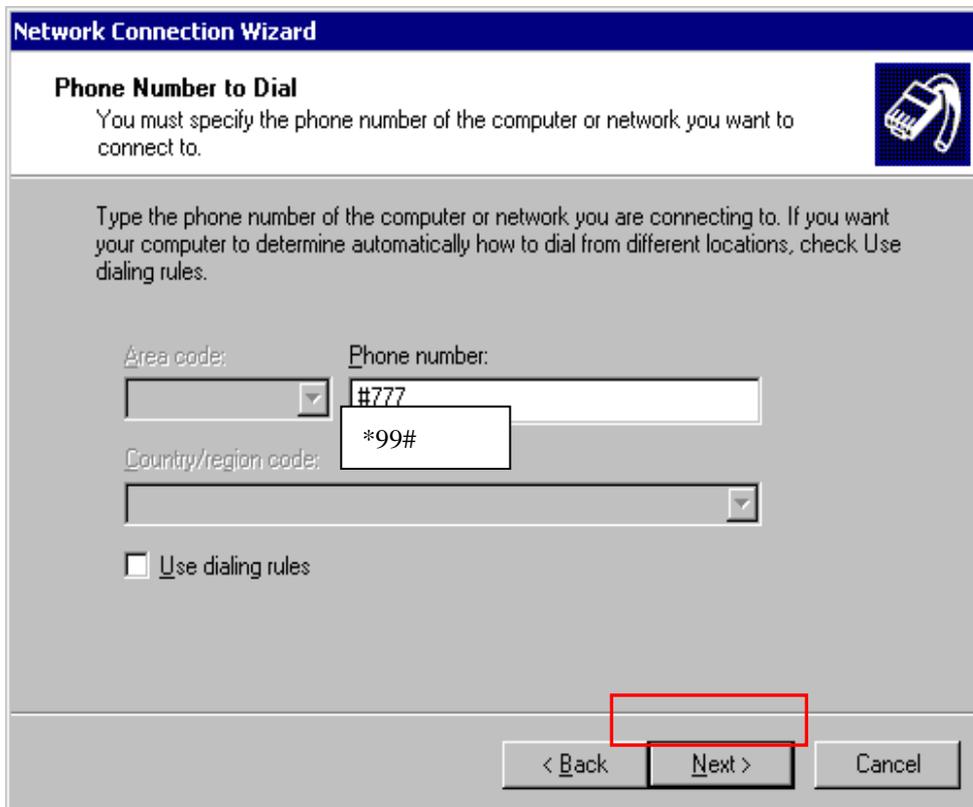
1) Start from "Control Panel", Open "Network and Dial-up Connections", click "New Connection", click "Next" to continue;

2) click "Next" as below.

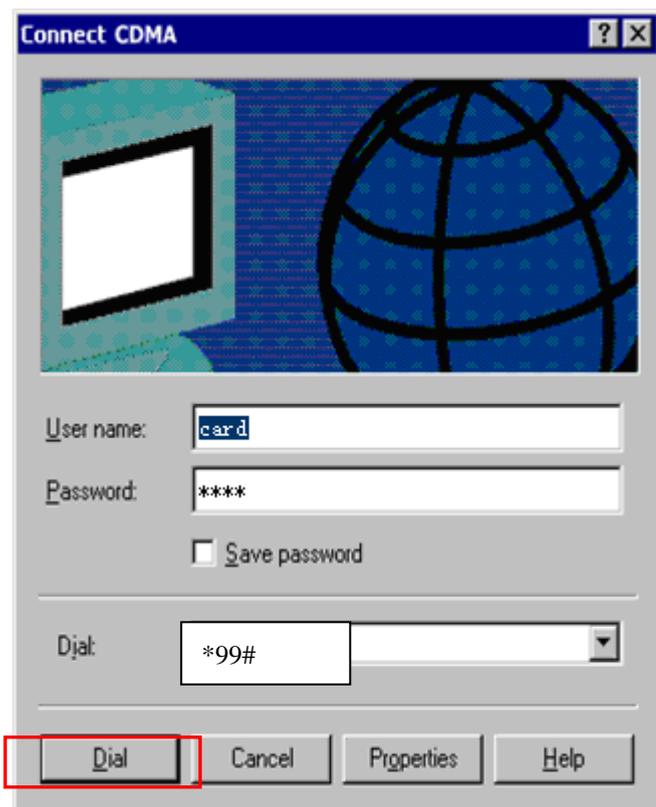3) As below picture, no select "Use dialing rules", click "Next" button.

The number "*99#" is service code as reference sample only. Please consult with local service provider for more details.

4) Input the connection name you have created such as WCDMA. then click finish.

5)   Double click the connection you have created.

Different network provider has different User name and password in worldwide, here China Unicom SIM Username and Password is card for example, Please consult with local service provider for details.

6) Click "Dial" Button to Create dialup network.